

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/EP05/002471

International filing date: 07 March 2005 (07.03.2005)

Document type: Certified copy of priority document

Document details: Country/Office: GB
Number: 0405314.6
Filing date: 09 March 2004 (09.03.2004)

Date of receipt at the International Bureau: 03 June 2005 (03.06.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



PCT/EP200 5 0 0 0 2 4 7 1



INVESTOR IN PEOPLE

EPO - DG 1

13. 04. 2005

(70)

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated

4 March 2005

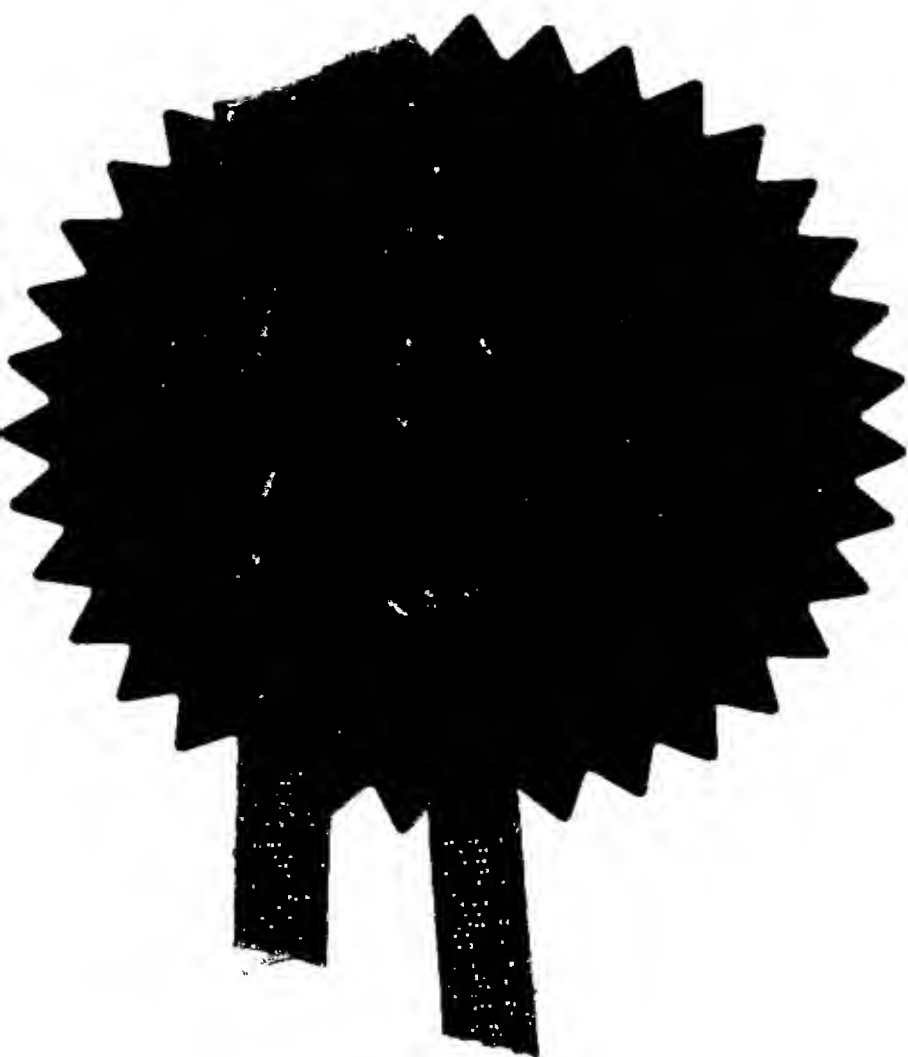


Patents Act 1977
(Rule 16)

The
Patent
Office

1/77

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

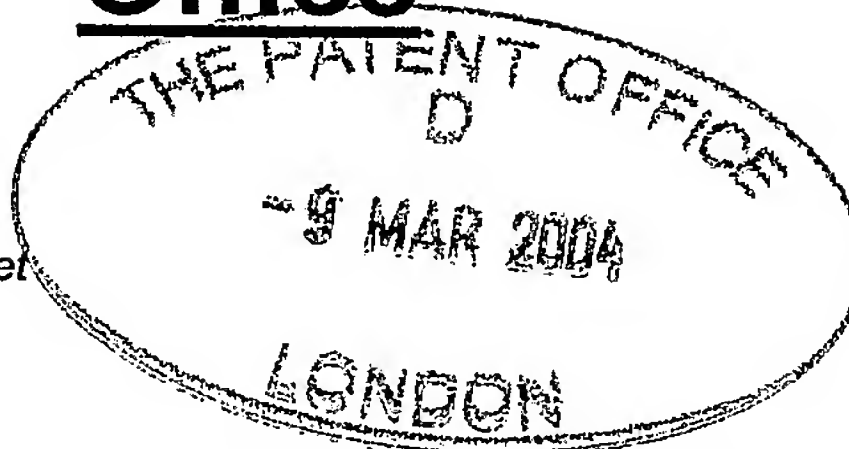

The Patent Office
Cardiff Road
Newport
South Wales
NP10 8QQ

| | | | |
|--|---|--|-------------------------------------|
| 1. Your reference | RFW/ND/CB60414P1 | | |
| 2. Patent application number (The Patent Office will fill in his part) | 0405314.6 | | - 9 MAR 2004 |
| 3. Full name, address and postcode of the or of each applicant (underline all surnames) Patents ADP number (if you know it) If the applicant is a corporate body, give the country/state of its corporation. | GlaxoSmithKline Consumer Healthcare GmbH & Co KG Bussmatten 1, D-77815 Buehl (Baden), , Germany 8304701001 German | | |
| 4. Title of the invention | Toothbrush | | |
| 5. Name of your agent (if you have one) "Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode) Patents ADP number (if you know it) | Corporate Intellectual Property GlaxoSmithKline Corporate Intellectual Property (CN9 25.1) 980 Great West Road BRENTFORD Middlesex TW8 9GS 8072555006 | | |
| 6. Priority: Complete this section if you are declaring priority from one or more earlier patent applications, filed in the last 12 months | Country | Priority application number (if you know it) | Date of filing (day / month / year) |
| 7. Divisionals: etc Complete this section only if this application is a divisional application or resulted from an entitlement dispute (see note f) | Number of earlier application | Date of filing (day / month / year) | |
| 8. Is a Patents Form 7/77 (Statement of inventorship and of right to grant of a patent) required in support of this request? | Yes | | |

Answer YES if:

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body
- Otherwise answer NO See note (d)

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

| | |
|----------------------------------|--------|
| Continuation sheets of this form | 21 |
| Description | 2 |
| Claim(s) | |
| Abstract | 7 only |
| Drawings | |

10. If you are also filing any of the following, state how many against each item.

Priority Documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application

Signature(s) R F Walker

Date: 9-Mar-04

12. Name and daytime telephone number of person to contact in the United Kingdom

R F Walker 020 80474485

Warning

After an application for a Patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least six weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' in part 8, a Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- Part 7 should only be completed when a divisional application is being made under section 15(4), or when an application is being made under section 8(3), 12(6), or 37(4) following an entitlement dispute. By completing part 7 you are requesting that this application takes the same filing date as an earlier UK application. If you want the new application to have the same priority date(s) as the earlier UK application, you should also complete part 6 with priority details.

Toothbrush

This invention relates to toothbrushes, in particular to toothbrushes having flexibly mounted bristles.

5 It is generally known to mount the bristles of a toothbrush in flexible mounts so that the mounting can respond to pressures applied to the bristles by resilient flexible deformation to cushion excess brushing pressures and to allow the bristles to accommodate themselves to the profiles of the teeth.

For example toothbrushes are known having the ends (the "proximate" end) of their bristles which are fixed into the head flexibly mounted in contact with a
10 resilient elastomer material membrane. US-A-4,633,542 discloses a toothbrush where the ends of individual tufts are moveably mounted with their proximate ends in contact with a flexible membrane. For example US-A-5,373,602 discloses a toothbrush in which the ends of the bristles are set in a rubbery flexible tip extension to the head. WO-A-96/02165 discloses a toothbrush in which the tufts are
15 set in a thermoplastic elastomer mount. US-A-5,454,133 discloses a toothbrush in which the proximate ends of individual tufts are mounted in contact with a flexible pad or a capsule containing a very soft gel or liquid. DE-A- 41 22 524 A discloses a toothbrush in which the proximate ends of bristles are mounted on a plate, the reverse side of which is in contact with an elastic pad. Trisa WO-A-98/43514
20 discloses a toothbrush head in which bristles in tufts are mounted in holders and are embedded in a soft elastic material. WO-A-00/60980 discloses a toothbrush head in which bristles in tufts have their ends linked by a web which is embedded in a soft elastic material. WO-A-98/35584 discloses a toothbrush head in which the bristle ends are mounted in rigid wells set in an elastomer material.

25 There is a problem with anchoring the bristles in such toothbrushes in that the polyamide materials e.g. nylons such as Tynex™, commonly used for bristles do not easily bond to common elastomer materials such as known SEBS thermoplastic elastomers. In US-A-4,633,542 the bristle tufts have their ends proximate to the head fused into rounded masses which are simply in contact with the membrane. In
30 WO-A-93/24034 the proximate ends of the bristles are again formed into rounded masses which are held in cavities in the membrane. In US-A-5,454,133 the bristle

tufts have their proximate ends fastened to a rubber base which is attached to the outer surface of the pad or capsule.

There is also an ever-present problem of improving and optimising the flexible mounting of toothbrush bristles in a toothbrush head, for example by the identification of improved materials and processes for toothbrush manufacture.

In recent years a class of polymer materials has been developed, primarily by Bayer AG, known as polyurethane gels. Such materials and methods of making them typically by reaction between an isocyanate component and a polyol component are for example disclosed in US-A-4,456,642 (Bayer AG), US-A-5,362,834 (Bayer AG), US-A-2002/0123562 (Bayer Corp.). Such gels often have a sticky surface and it is also known to provide such gels in a form enclosed with a flexible, normally elastic, film which may for example also comprise a polyurethane or other polymer. It is known e.g. from US-A-2002/0123562 (Bayer Corp.) to form such a coating *in situ* in the mould in which an article made from such a gel is made, i.e. the so-called in mould coating process ("IMC"). Although some polyurethane gels may be capable of injection moulding, it is also common to form the gel *in situ* in the mould by introduction of the isocyanate and polyol components into the mould and allowing them to react. Such polyurethane gels are sold under the trade name Technogel™ for example from the Technogel group of companies. To date such polyurethane gels have found use as inserts for shoes, cushions, soft car dashboard parts, bicycle saddles and other padded articles.

It is an object of this invention to provide a toothbrush in which the bristles are flexibly mounted onto the head which overcomes at least in part the problems encountered with the above-mentioned toothbrushes of the state of the art.

It is also an object of this invention to provide a novel use for the above-mentioned polyurethane gels.

It is also an object of this invention to provide a novel process for making a toothbrush head.

Other objects and advantages of the present invention will be apparent from the following description.

According to this invention a toothbrush head, connected to or connectable to a toothbrush grip handle, is provided having bristles projecting therefrom in a

○ bristle direction, each bristle having an end proximate to the head and an end distanced from the head,

characterised by the head incorporating a mass of a gel material, and at least a part of a bristle adjacent its end proximate to the head being embedded in the mass
5 of gel material.

Gel materials may be distinguished from elastomers by the visco-elastic character of gels, i.e. though a gel deforms resiliently under pressure or tension, on release of the pressure or tension a gel does not immediately bounce back into its original shape like an elastomer does but returns to its original shape more slowly.

10 The gel material is preferably a polyurethane gel material. An example of a gel material is for example as disclosed in the above-mentioned US-A-4,456,642, US-A-5,362,834 and US-A-2002/0123562. For example such a polyurethane gel may comprise a high molecular weight polyurethane based on 15-62 wt% of a high molecular weight covalently crosslinked polyurethane matrix, and 38-85 wt% of a
15 liquid dispersing agent firmly bound in the matrix, wherein the liquid dispersing agent contains one or more polyhydroxyl compounds having a number average molecular weight of ca. 1000 to 12000 and an OH number of between ca. 20 to 112 and where the dispersing agent is substantially free from hydroxyl compounds having a molecular weight below 800. Such gels form deformably elastic masses
20 which retain their shape under the action of gravitational force on the toothbrush head, i.e. they are dimensionally stable, but deform under the action of applied pressure. The properties of the gel may be varied by variation of the starting components and ratios thereof but those gels which have a soft, somewhat tacky, gelatinous consistency are preferred. Gel materials as available at the date hereof
25 under the name Technogel™ are preferred gel materials, for example as available from e.g. from Technogel Königsee, Gewerbegebiet Alle Gärnerei, 37339 Berlingerode (DE), for example the gel material BTG 120. A suitable gel material of this type may have a hardness of less than 10 Shore A, preferably less than 2 Shore A. The hardness of the gel may also be expressed on the IRHD scale and a
30 suitable hardness is IRHD L 0- 100, for example L 25-65. Polyurethane gels of the above-mentioned type may be made with a wide range of hardness.

Suitably the mass of gel material is at least partly covered by, e.g. enclosed within, an elastic film coating, i.e. a coating which can deform elastically as the gel mass deforms under the influence of force and stretch or contract as the mass of gel expands or shrinks under tension or compressive pressure. In the case of the above-mentioned polyurethane gels suitable film coatings are known in the art, for example polyurethane films, thermoplastic polyester films, thermoplastic elastomers such as thermoplastic polyester elastomers or block co-polymers based on styrene and butadiene, films based on ethylene-vinylacetate polymers, natural or synthetic rubbers, or plasticised polyvinyl chloride. Various methods are known in the art to apply such a coating to such a mass of gel, a preferred process being the known IMC process. It is preferred that at least the part of the mass which has a surface exposed to the ambient environment is covered by such a coating. Such a coating can improve the surface feel, e.g. a smooth coating can cover a tacky gel. The thickness of such a film may be conventional in the art of polyurethane gel articles.

The gel material and/or the film may for example include a colourant material for aesthetic reasons or to draw the customers' attention to the presence of the gel mass.

The bristles may be made of a conventional bristle material e.g. a polyamide material e.g. nylons such as TynexTM (DuPont) abovementioned, or polyester. For example nylon monofilaments of diameter ca. 0.10 – 0.75 mm, such as those commercially available from DuPontTM under the name DuPont TynexTM, made from Nylon 512 may be used.

A particular advantage of the abovementioned polyurethane gel material e.g. TechnogelTM is that such bristles are found to readily bond with such a gel material without the use of the holder, web etc. used in the state of the art (although such holders or webs may be used in the present invention). For example a conventional tuft of plural TynexTM bristles ca. 1 mm tuft diameter embedded into a pad of a TechnogelTM polyurethane gel to a depth of ca. 2-3 mm can require up to 19N force to pull it out.

The adherence between polyamide bristles and the polyurethane gel material may be due to the presence of amide groups in both polyurethanes and nylon and may also apply to polyurethanes other than gels, e.g. elastomeric polyurethanes.

Therefore a further aspect of the invention provides a toothbrush head having bristles projecting therefrom in a bristle direction, each bristles having an end proximate to the head and an end distanced from the head,

characterised by the head incorporating a mass of a polyurethane material,
5 and at least a part of a bristle adjacent its end proximate to the head being embedded in the mass of polyurethane material.

The mass of polyurethane material may be a polyurethane gel material, e.g. as disclosed herein, or a polyurethane elastomer material.

Therefore in the toothbrush of this invention over the entire part of the
10 bristle(s) or tufts thereof which is embedded in the mass of gel material or polyurethane material, the bristle(s) or tuft may be directly in contact with the gel or polyurethane material. That is, there need be no web or holder means as hitherto used in the prior art to retain the bristles.

The proximate end of the bristle(s) or tuft(s) and a length of the bristle(s)
15 adjacent thereto toward the end distanced from the head may be embedded in the mass.

Typically a toothbrush comprises a head and a grip handle disposed along a head – handle longitudinal direction, optionally with a neck longitudinally between the head and handle. Typically the head is elongate in line with this longitudinal
20 direction, and has a tip end longitudinally remote from the handle, and a longitudinally opposite base end closest to the handle. Typically the mass of gel or polyurethane material has a surface from which bristles extend, the “bristle face”, in a bristle direction transverse to, typically generally, perpendicular to the longitudinal direction.

25 The mass of gel may typically comprise a pad having such a bristle surface, and having an opposite surface, the “back surface”, distant from the bristle face in a direction, the “thickness direction”, transverse to the longitudinal direction. There is an edge surface between the bristle surface and the back surface

The mass of gel or polyurethane material may have a thickness, i.e. its
30 dimension in the bristle direction, up to the conventional thickness of toothbrush heads, for example 3-5 mm. The toothbrush head will normally be connected to, or connectable to in the case of a replaceable head toothbrush, a toothbrush handle to

○ define a head-handle longitudinal direction. In directions perpendicular to the bristle direction, for example in the longitudinal direction and in the width direction perpendicular to the longitudinal direction the mass may have a dimension up to the entire length or width of a conventional toothbrush head, typically up to 3cm long or up to 1.5 cm wide. In practice the dimensions of the mass may be selected in combination with the mass to provide a desired degree of flexible mounting of the toothbrush bristles.

The toothbrush head of this invention may comprise a single mass of the gel or polyurethane material, or may comprise two or more masses of the gel or polyurethane material. When there are two or more such masses they may be the same gel or polyurethane material or different materials, e.g. having different compositions, coatings, hardness, colour etc. When there are two or more such masses they may have the same dimensions or different dimensions, e.g. differing in thickness etc. Two or more such masses may be disposed in various ways about the toothbrush head, e.g. they may be disposed sequentially longitudinally, sequentially widthways, or one mass may surround another.

As viewed looking down the bristle direction a mass of gel or polyurethane material may in plan be polygonal, circular, oval, strip form, or correspond generally to the shape of the toothbrush head or a part thereof. For example the material may occupy substantially the entire area of the head from which bristles project. A mass of material may be located adjacent the end of the head closest to or furthest from the handle or at an intermediate longitudinal position. Typically the mass is in the form of a pad with greater longitudinal and width dimensions than thickness. The bristles project from a surface of the mass, and this surface (the "bristle surface") may be flat, convex, concave or undulating e.g. having a surface comprising plural rounded domes or cones, or of a wave-form.

Typically the toothbrush head of this invention comprises a frame of a hard plastics material, as commonly used in toothbrush manufacture, e.g. polypropylene ("PP"), polyamide ("PA"), acrylonitril butadiene styrene ("ABS") etc., by which the mass is supported. Such a frame may for example comprise a ring shape of the plastics material defining the perimeter of the head supporting the mass at the perimeter of the mass. Alternatively the frame may comprise a back surface against

which the mass is in contact. Alternatively the frame may comprise one or more cavity each respectively supporting one or more mass of the material or supporting a part of a mass of the material. Alternatively the frame may comprise a longitudinally extending skeleton. The frame and mass may be provided with
5 respective engagement features to retain the mass and frame in secure physical engagement, and/or the frame and mass may be bonded e.g. by a weld, adhesive or adherence between the frame and the mass. It is found that the gel and polyurethane materials mentioned above, particularly polyurethane gels such as the Technogel[™] polyurethane gel materials bind well to the plastics materials commonly used for
10 toothbrush manufacture, in particular PA and ABS.

The frame may also be provided with one or more aperture passing through the frame from one surface of the frame to another surface of the frame, through which the material of the mass passes from the one surface to the other surface to form a mushroom head at the other surface to thereby engage with the frame.

15 In a preferred construction of head the mass, preferably in the form of a pad having a bristle surface, is supported by such a frame at a support point adjacent to the tip end and at a support point adjacent to the base end, but is unsupported longitudinally between these two longitudinally spaced support points. This construction allows the mass to deform under the influence of pressure applied to
20 the bristle face, e.g. during toothbrushing. In this preferred construction a part of the frame longitudinally between these support points may arch away from the back surface of the pad in a direction opposite to the bristle direction, to leave a void between the back surface and the frame. For example only up to ca. 25% of the length of the pad immediately adjacent to the tip end and only up to ca. 25% of the
25 length of the pad immediately adjacent to the base end may be supported by such a frame. In this construction the side surface of the pad longitudinally between the supported parts of the pad may be left unsupported.

Typically bristles may be disposed in tufts containing conventional numbers of bristles and of generally conventional shapes and dimensions. For example tufts
30 may contain 5-100, preferably 10-75, e.g. 30-60 bristles per tuft. Such tufts may for example be of circular or non-circular e.g. longitudinally or widthways elongated cross section, and may have a typical dimension across their length of 0.75 – 5mm.

○ Circular sectioned tufts typically have a diameter ca. 0.9-1.5mm, and may have their ends proximate to the head embedded in the mass of gel material to a depth of 0.5 - 5 mm, typically 1 - 3 mm, for example so that the proximate ends are disposed part way through the thickness of the mass from the bristle surface. In such tufts the proximate ends of the individual bristles may be melted by heat so that they fuse together to form a blob, and then allowed to cool and solidify, prior to being embedded in the mass. Techniques to fuse the ends of toothbrush bristle tufts are known in the art. Alternatively bristles may be embedded individually rather than plurally in tufts.

10 The depth at which the proximate end of a bristles is disposed in the mass of gel or polyurethane material will be among the factors determining the flexibility with which the bristle is mounted (other factors e.g. include bristle material, dimensions etc.), and different tufts or individual bristles may have their proximate ends disposed at different depths within the mass to provide bristles or tufts of different flexibility of mounting. The bristles may project in a bristle direction substantially perpendicular to the longitudinal axis of the toothbrush, but may alternatively be angled to the vertical.

 Another particular advantage of the abovementioned polyurethane gel material e.g. Technogel™ is that such gels are available having softness which provides greatly improved flexible mounting of bristles therein.

20 Other parts of the toothbrush for example the toothbrush handle may be of generally conventional construction. For example the handle may incorporate one or more "S" bends as disclosed in EP-A-0 336 641. Additionally or alternatively the toothbrush may incorporate flexible links at other places in its structure, for example between its head and the immediately adjacent part of its handle, i.e. its neck, e.g. as disclosed in WO-A-92/17092 or WO-A-97/24949, or the head may comprise two or more flexibly linked segments for example as disclosed in WO-A-92/17093 or WO-A-97/07707, or there may be a flexible link both between the head and neck, and dividing the head into flexibly linked segments, e.g. as disclosed in 30 WO-A-98/37788.

 A further aspect of this invention provides a process for making a toothbrush head having bristles projecting therefrom in a bristle direction, each bristle having

an end proximate to the head and an end distanced from the head, the head incorporating a mass of a gel or polyurethane material, and at least a part of a bristle adjacent its end proximate to the head being embedded in the mass of gel material or polyurethane material.

5 Preferred features of the head, gel or polyurethane mass, bristles etc. are as discussed above.

In the case of polyurethane elastomer materials processes are known from the state of the art referred to above for forming a mass of polyurethane material with bristles embedded therein.

10 A preferred form of this process comprises:

(1) providing a mould having a mould cavity suitable for forming the mass of a gel material in, and having at least one aperture leading from said cavity toward the exterior of the mould and being suitable for the insertion therethrough of at least one toothbrush bristle such that an end of the bristle projects into the cavity,

15 (2) depositing a coating-forming material on the inner surface of the cavity,

(3) inserting at least one bristle through said aperture so that an end of the bristle extends into the cavity,

(4) introducing a gel material into the cavity such that at least part of the bristle extending into the cavity becomes embedded in the gel material and the coating-forming forms a coating around at least part of the mass of gel material.

20 The mould may be generally conventional, e.g. being made of conventional metals such as steel, split along a parting line into two or more parts each part comprising a part-cavity which may be brought together to form the mould cavity, having at least one port for the introduction of the gel material, having generally conventional ejector means for ejecting the so-formed mass from the mould etc. 25 Many of such features of the mould are generally conventional in the art of toothbrush manufacture.

The coating-forming material may be a conventional coating-forming material as used in the art of polyurethane gel technology to for example form an elastic polyurethane coating around the gel mass, see for example the IMC process 30 disclosed in US-A-2002/0123562. The coating-forming material may for example be provided in liquid form and may be sprayed or otherwise deposited on the inner

○ surface of the cavity, preferably before part moulds are closed, but a mould may be constructed in which the material is sprayed onto the inner surface of the mould cavity after closure of part moulds. After depositing the coating-forming material onto the inner surface of the cavity the material may be allowed or caused to form the coating e.g. by gentle heating, or the material may be caused to form the coating subsequent to introducing the gel material, e.g. by causing the coating forming material to cure and harden.

At least one tuft of bristles may now be inserted through the aperture so that an end of the bristle extends into the cavity. This insertion operation is conventional in the art of so called "anchorless" bristled toothbrush heads in which the ends of the bristles or tufts are embedded in the hard plastic material of the head as this is injected into the mould to form the head, rather than being retained by the previously used small metal "anchors", and conventional insertion machinery e.g. as supplied by Zahoransky Formgebung GmbH (DE) may be used. It is preferred to perform the deposition of the coating-forming material before the insertion of the one or more bristle otherwise the coating-forming material may become deposited on the bristle(s) and interfere with the bonding or otherwise adherence of the gel material to the bristle(s). Plural bristles may be bundled together in a conventional manner to form a tuft, and prior to but preferably after inserting a tuft into the mould through the aperture the proximate end of the tuft may be melted by heat in a conventional manner e.g. as disclosed in EP-A-0 142 885 so that the ends fuse into a blob and are then allowed to cool and solidify. Conventional insertion machinery and suitable selection of relative dimensions for the tuft and aperture may also provide a fluid-tight seal between the tuft and aperture. For example the bristles may be bundled to form a tuft, an end of the tuft inserted through the aperture in a part of a multi-part mould whilst the mould is open, so that the end projects from the inner surface of the mould, the end may be fused and allowed to cool as described above, then the mould may be closed. Preferably the proximate end of the tuft is inserted through the aperture to a distance such that some un-fused bristles are present within the mould cavity, i.e. only a short part of the proximate end is fused, so that when the gel is introduced into the cavity the gel can infiltrate between the un-fused bristles to facilitate anchoring of the tuft into the gel mass.

When the mould is closed the gel material may be introduced into the mould cavity. Conventional methods may be used to introduce the gel material. Some gel materials e.g. thermoplastic polyurethane ("TPU") may be injected under pressure into the mould in a conventional injection moulding process, i.e. in a hot fluid state and allowed to cool to achieve their final gel state.

Alternatively the gel material may be introduced into the mould as a fluid precursor which needs to undergo a chemical reaction to cause it to set into its final gel state. For example such a precursor may comprise a mixture of reagents which react in the cavity to form the gel material, e.g. comprising an isocyanate component and a polyol component (e.g. as disclosed in US-A-5,362,834) which react to form a polyurethane gel. Such reagents may be introduced into the mould cavity in a pre-mixed state or may be introduced separately into the cavity to mix *in situ* therein. Using conventional reagents of this type mould cycle times of ca.10-20 seconds may be achieved, although subsequent gradual hardening of the gel material may occur during subsequent storage. Polyurethane gels may be formed in this way at ambient temperatures and pressures in the mould, although elevated temperatures generally accelerate the reaction process. The precursor material introduced into the mould cavity may include a catalyst to induce reaction to form the gel, and the catalyst in the precursor may also serve to convert the coating forming material into the elastic film. Otherwise known curing processes may be used to convert the coating forming material into an elastic coating. By covering the sticky surface of the gel, the coating material can help to prevent the mass of gel from sticking to the inner surface of the mould cavity, i.e. to some extent additionally functioning as a mould release agent.

The gel or its precursor should be introduced into the mould cavity at such a pressure and in such a fluid state that it infiltrates between the individual bristles in a tuft. In this way the tuft can become firmly anchored into the mass of gel.

Thereafter the mould may be opened, e.g. the part moulds separated at their part line, and conventional ejection apparatus may be used to eject the mass of gel with the tufts embedded therein, from the mould.

The above described process may be performed in a variety of modes. In one mode the mass of gel with the tufts embedded therein may be made as a

○ separate part from the hard plastic part(s) of the toothbrush head, e.g. the above-mentioned frame, and this formed mass of gel with the tufts embedded therein may then be fixed into the head, e.g. by means of mechanical fixing such as by means of interlocking parts of the mass and the frame, or by means of the head having
5 suitable retention means to securely hold the mass in place. For example the head may comprise connecting parts which connect to at least partly enclose and/or grip the mass. For example the gel mass, particularly the coating, may be adhered to the head by e.g. an adhesive or weld.

10 In another mode at least part of the head of the toothbrush may itself be enclosed within the mould cavity, which may be done simultaneously or before or after insertion of the bristle(s) through the aperture, so that a surface of the head, e.g. of the frame, is exposed to the interior of the cavity, and so that when in their inserted position with the mould closed the end of the bristle(s) is in close proximity to the head, and the gel or its precursor may then be introduced into the mould to
15 form the gel mass *in situ* in position on the head and fixed thereto. It is preferable to deposit the coating-forming material on the interior surface of the mould cavity before enclosing the at least part of the head within the cavity so that the coating-forming material is not deposited on the head where it might interfere with adherence of the gel material to the hard plastic of the head. It is found that the
20 above mentioned polyurethane gel materials adhere well to the kinds of hard plastic materials commonly used for toothbrush manufacture such as PA, ABS and PP both when they are injected into the mould cavity in fluid form as a TPU, or formed *in situ* in contact with the hard plastic material from a precursor as described above. Alternatively or additionally the head may have one or more engagement means so
25 that when the gel is introduced into the mould in a fluid form, e.g. by TPU injection or as a precursor and then sets into its final state the head and mass are securely mechanically connected, for example by the fluid flowing around the engagement means.

30 Alternative processes will be apparent to those skilled in the art, for example the mass of gel material with bristles embedded therein may be formed first, then the coating may be formed using known processes for example applying a solution

or precursor of a coating material in a fluid state and allowing this to form the coating.

Suitable plastics materials from which the head and handle of the toothbrush of the invention may be made includes plastics material such as known plastics materials which are used in the manufacture of toothbrushes. For example known PP, PA and ABS materials may be used, optionally in combination with elastomer materials commonly used as components of so called two-component toothbrushes. Known injection moulding processes may be used to make the toothbrush of the invention from such plastics materials and elastomer materials.

The invention will now be described by way of example only with reference to the accompanying drawings in which:

Fig. 1 shows a longitudinal section through a toothbrush head of this invention.

Fig. 2 shows plan views of various toothbrush heads based on that of Fig. 1.

Fig. 3 shows an enlarged section through the gel mass of Fig. 1.

Fig. 4 schematically shows a process for making the toothbrush head of Fig. 1 and Fig. 2.

Figs. 5 and 6 show a preferred form of frame to support the gel mass.

Figs. 7, 8, 9, 10 and 11 show the frame of Figs. 5 and 6 with the gel mass in place.

Parts referred to in Figs. 1-11:

10 head of a toothbrush

11A handle end

11B tip end

12 grip handle

13 ring-shaped frame

14 closed back surface (optional)


15 central cavity

16 partition

17,18 cavities

19 engagement flange

20 mass of gel material



- 21,22 two masses of gel material
 - 23,24,25 three masses of gel material
 - 26,27 two masses of gel material
 - 28 thin elastic coating of a polyurethane
 - 5 30 embedded bristles
 - 30A proximate ends of bristles
 - 30B fused bristles
 - 30C unfused bristles infiltrated with gel
 - 40 mould generally
 - 10 41,42 two part moulds
 - 43,44 two part cavities
 - 45 plural apertures for insertion of tufts
 - 46 port
 - 47 formed toothbrush head
 - 15 50 toothbrush head
 - 51 grip handle
 - 52 tip end of head
 - 53 base end of head
 - 54 pad of gel material
 - 20 55 pad "bristle face"
 - 56 pad "back surface"
 - 57 pad edge surface
 - 58 frame
 - 59 support point
 - 25 510 support point
 - 511 cavities
 - 512 side walls
 - 513 apertures
 - 514 "mushroom head"
 - 30 515 part of frame
 - 516 void
-

Referring to Figs. 1 and 2 the head 10 of a toothbrush of the invention is shown, being of elongate shape and integrally joined at one longitudinal end 11A to a grip handle 12 of which only the part proximate to the head 10 is shown, and having an opposite tip end 11B. The head 10 and handle 12 are arranged along a longitudinal direction A--A. The head 10 and handle 12 are integrally made of plastic material, typically a PA, ABS or PP.

As seen more clearly in the plan views of Fig. 2 the head 10 is in the shape of a ring-shaped frame 13 of an overall shape conventional in the art of toothbrush heads. As seen in Fig. 1 this frame 13 has an open upper and lower face, but as shown with dashed lines in Fig. 1 may have a closed back surface 14. The interior of the ring shaped frame defines a central cavity 15. As shown in Fig. 1 there is a single cavity within the frame 13. The frame may for example be bridged by e.g. an integral plastics material partition 16 to form two separate cavities 17, 18 (see Fig. 2B). The frame 13 is formed with an engagement flange 19 around its inner perimeter.

Within frame 13 is fixed a mass of a gel material 20, in which are embedded bristles 30. The bristles 30 project from the mass 20 in a bristle direction shown by the arrow. The bristles 30 have ends 30A proximate to the head which are embedded in the mass of gel material and ends 30B distanced from the head. The mass 20 is generally in the shape of a flattened pad corresponding to the internal shape of the frame 13 and occupying the cavity 15. Although as shown in Fig. 1 the mass has a flat upper (i.e. facing in the bristle direction) surface, this upper surface may be convex, concave, rippled in an undulating manner or any other surface profile. The opposite lower surface may be in contact with the back face 14 if this is present or there may be a gap between the lower surface and the back wall. The gel mass 20 is retained in place by its engagement with the engagement flange 19, but as made by the process described below is also securely bonded to the material of the frame 13.

Alternatively the mass can be secured in place by other means, e.g. by making the frame in an upper frame part and a lower frame part and fixing these together to clamp the mass between them.

.....

Fig. 2A shows the plan view of the head of Fig. 1. As seen in Figs. 1 and 2 there is a single mass 20, but as seen in Fig. 2 there may be two or more masses. Fig. 2B shows two masses 21, 22 separated by the integral partition 16. Fig. 2C shows three masses 23,24,25 in contact with each other and sequentially
5 longitudinally disposed. Fig. 2D shows two masses 26,27 in which one mass 26 is surrounded by the other mass 27. The various masses 21-27 may each be the same, or may differ in relative softness or in other characteristics e.g. colour. For example masses 23 and 25 may be relatively softer than mass 24, or vice versa. For example the masses 23, 24,26 may progressively be softer, or mass 26 may be
10 softer than mass 27 or vice versa. Masses 26,27, and 23,24,25 in contact with each other may be bonded together. The pattern of bristle tufts 30 shown is purely representative, bristles are omitted for clarity from Figs. 2C and 2D. In Fig. 2B bristle tufts 30 are shown which are of longitudinal or widthways elongated sections.

15 Numerous other constructions of a suitable head comprising a hard plastics material frame or skeleton with bristles embedded in a polyurethane gel mass will be apparent to those skilled in the art. For example the frame may comprise a plate forming the back face of the toothbrush head, with the gel mass attached to the opposite face of the plate.

20 Referring to Fig. 3 the proximate end 30A of a tuft of plural bristles 30 and the immediately adjacent part of the gel mass 20 are shown. At the proximate end 30A the individual bristles in the tuft 30 have been fused together over length 30B by the application of heat in a conventional manner, e.g. radiant heat, hot gas or contact with a hot surface, and allowed to cool and solidify into a solid blob. This
25 proximate end 30A is embedded in the mass 20 of gel material. At the proximate end 30A the entire part of the bristles which is embedded in the gel material is directly in contact with the gel material. Only a short length 30B of the tuft adjacent to the proximate end of the tuft 30 toward the distanced end has been fused, so that the gel material 20 has infiltrated between individual bristles of tuft 30, i.e. a length
30 of unfused individual bristles 30C remains above part 30B, between part 30B and the upper surface 20A of the gel mass 20. The mass 20 is a gel of the type sold under the trade name Technogel™, i.e. a soft polyurethane gel and is covered by a

○ thin elastic coating 28 of a polyurethane, the thickness of which is greatly exaggerated in Fig. 3. Such material may be a Technogel™ as available from Technogel Königsee GmbH for example the material BTG 120.

5 Bristle tufts 30 mounted in the mass 20 as shown have the advantages that they can both swivel elastically about their mountings about any axis in a cone with its apex at the mounting point, and also move elastically up and down under pressure experienced during tooth cleaning. These movements can help the bristles to accommodate to the surfaces of the teeth and gums, e.g. the interdental spaces, and to relieve excessive brushing pressures. In the mass 20 all of the tufts 30 may
10 be mounted with their proximate ends 30A at the same depth in the mass 20, or alternatively bristles, tufts or groups of tufts may be mounted at different depths to give them different elastic swivelling and up and down flexibility. Generally the shallower the mounting the less force is needed to swivel the bristle or tuft. For example in a head provided with more than one mass 20, e.g. as shown in Fig. 2A-
15 2D the respective tufts 30 embedded therein may be mounted with their proximate ends 30A at different depths in the gel mass 20.

Referring to Fig. 4 a process for manufacturing a toothbrush head of this invention is shown schematically.

In Fig. 4A a mould 40 (generally) is shown in section. Mould 40 comprises
20 two part moulds 41, 42 which are conventionally split and between them define two part cavities 43,44 which when the mould is closed form the mould cavity 43,44. In part mould 41 are plural apertures 45 leading from the part cavity 43 toward the exterior of the mould and are suitable for the insertion therethrough of respective plural tufts of toothbrush bristles (30 in Figs 1-3) such that an end of each tuft may
25 project into the cavity. Moulds of this type with apertures, and machinery for inserting tufts of bristles through them are known in the field of toothbrush manufacture. The part cavity 44 of part mould 42 is shaped to receive the frame 13 of a toothbrush head 10 as shown in Figs. 1 and 2. Part mould 42 has a port 46 through which fluid material may be introduced into the cavity 43,44.

30 A coating-forming material (not shown) is deposited on the inner surfaces of the cavities 43,44 by for example spraying or brush coating of a liquid coating forming material, such as an elastic polyurethane film forming material, which may

be a material of a type known for a IMC process. This coating forming material is then allowed to form the coating by gentle heating in a known manner.

As shown in Fig. 4B plural tufts of bristles 30 are inserted through apertures 45 so that a proximate end 30A of the tuft 30 extends through from the inner surface of the cavity 43. The proximate ends 30A extend to such a distance from the inner surface of part cavity 43 that when the mould is subsequently closed (as seen in Fig. 4E) the end 30A is distanced from the opposite inner surface of part cavity 44.

As shown in Fig. 4C the ends 30A of the tufts 30 are now fused by the application of heat and then allowed to cool to form a blob 30B of hardened material at the end 30A.

As shown in Fig. 4D, in parallel with the above-described operations a frame 13 is enclosed in cavity 44.

As shown in Fig. 4E The mould 40 is now closed and a polyurethane gel material is now introduced into the cavity 43, 44 by introducing a fluid mixture of a polyol component and an isocyanate component into the cavity via port 46 under conditions such that the mixture infiltrates between the individual bristles of the tuft 30 and then sets to form the polyurethane gel. Alternatively a thermoplastic polyurethane gel material may be injected under pressure into the mould in a hot fluid state in a conventional injection moulding process under conditions such that

the hot fluid material infiltrates between the individual bristles of the tuft 30, and then sets to form the polyurethane gel. In this way the end 30A extending into the cavity becomes embedded in the gel material. Under the conditions of either formation of the polyurethane gel *in situ* from the polyol and isocyanate components, or injection as a fluid which sets, the gel mass 20 becomes firmly adhered to the frame 13, interlocking with the engagement flange 19, and the bristles 30 of the tuft become firmly fixed into the gel material 20.

Thereafter the mould 40 may be opened, i.e. the part moulds 41,42 are separated at their part line, and conventional ejection apparatus (not shown) may be used to eject the formed toothbrush head 47 with the mass of gel 20 with the tufts 30 embedded therein, from the part mould 42.

○ An analogous process may be used to make a toothbrush head of the type shown in Fig. 1 having the closed back surface 14. However in this case if the polyurethane gel is to be introduced via port 46 it may be necessary to provide an orifice (not shown) through the closed back surface 14 so that the gel material may pass from port 46 into the mould cavity 43,44. Alternatively the port 46 may be located in another position in the part mould 41 or 42. Various other locations for the port 46 will be apparent to those skilled in the art.

It will be understood by those skilled in the art that by an analogous process a pad 20 of a gel mass may be made *per se* separately from frame 13 and then introduced into the frame 13 and fixed therein.

Referring to Figs. 5 and 6 a preferred form of frame is shown. Fig 5 shows a plan view looking down toward where the bristle surface is to be in the completed head. And Fig. 6 shows a longitudinal sectioned view about line A - - A of Fig. 5 looking in the direction of the arrow. As seen in Figs. 5 and 6 a toothbrush head 50 is seen, and part of the grip handle 51 immediately adjacent to the head 50. The head 50 and handle 51 are disposed along a head - handle longitudinal direction A - -A. The head 50 is elongate in line with this longitudinal direction, and has a tip end 52 longitudinally remote from the handle 51, and a longitudinally opposite base end 53 closest to the handle 51. Bristles are not shown in Figs 7, 8 and 9 for clarity. Fig. 7 shows a plan view corresponding to Fig. 5 showing a pad 54 of gel material in place. Fig. 8 shows a section corresponding to Fig. 6 but with pad 54 of gel material in place, and Fig. 9 shows a cross section through the head 50 of Fig. 8 with pad 54 in place, cut at line B - - B of Fig. 8.

The mass of gel 54 comprises a pad having a surface 55, the "bristle face" from which bristles (not shown) are to project in a manner analogous to Fig. 1, and having an opposite surface 56, the "back surface", distant from the bristle face 55 in a direction, the "thickness direction", transverse to the longitudinal direction A - - A. There is an edge surface 57 between the bristle face 55 and the back surface 56. Surface 55 is generally in a plane parallel to the longitudinal direction A - - A of the head 50. Bristles (not shown) extend from this bristle face 55 in a bristle direction perpendicular to the longitudinal direction A - - A.

.....

○ The head 50 comprises a frame 58 integrally made with handle 51 of plastics material such as polypropylene. As seen in plan view in Fig. 5 the frame is approximately "Y" shaped with its stem aligned with the longitudinal direction A - - A and the two arms adjacent to the handle 53. Frame 58 supports pad 54 at a support point 59 adjacent to the tip end 52 and at a support point 510 adjacent to the base end 53. To achieve this support the frame 58 is formed with respective cavities 511 bounded by sidewalls 512, in which pad 54 fits. One of the cavities 511 adjacent to the tip end of the head 50 is adjacent to the stem of the "Y" shaped frame 58, and the other cavity 511 is adjacent to the handle 51 and is between the arms of the "Y" shaped frame 58. These cavities 511 are provided with apertures 513 passing through the plastics material of the frame 58 from a surface of the frame within the cavities 511 to an outer surface of the frame opposite the cavity 511. The apertures are wider at the outer surface of the frame, so that the material of the mass 54 passes through these apertures 513 to form a "mushroom head" 514 at the outer surface so that the material of the mass 54 engages with the frame 58.

A part 515 of the frame longitudinally between support points 59, 510 arches away from the back surface 56 of the pad 54 in a direction opposite to the bristle direction, to leave a void 516 between the back surface 56 and the part 515 of frame 58. It is seen in Fig. 8 that ca. 25% of the length of the pad 54 immediately adjacent to the tip end 52 and the base end 53 is supported by the frame. As seen in Fig. 9 the side surface 57 between these supported parts of the pad 54 are unsupported.

As seen in Figs. 10 and 11, which are sections corresponding to Figs. 8 and 9 the mass 54 deforms under the influence of pressure applied to the bristle face in the direction of the arrow e.g. during toothbrushing. The void 516 allows this deformation.

Experimental Example

The material Technogel™ is a polyurethane gel covered with a polyurethane coating and is available from the company Technogel Königsee, Gewerbegebiet Alle Gärnerei, 37339 Berlingerode (DE), for example as the gel material BTG 120, in the form of polyurethane film coated sheets ca. 5mm thick. These sheets are made using an IMC process by introducing the polyurethane gel precursor reagents into a



mould and allowing them to react to form the gel. Conventional Tynex™ toothbrush bristle filaments were bundled into circular sectioned tufts ca 1.0 – 1.2 mm diameter with a conventional bristle density, both white and blue colour filaments being used. Such filaments were also bundled into oval sectioned tufts of major:minor axis dimensions 6mm : 4mm. An end of each of such tufts was melted by touching against a hot surface and allowed to cool and re-solidify so that a blob of fused bristle material ca. 0.5mm long was formed. The fused ends were held in the mould and the gel formed under standard conditions as described above so that ca. 4.5mm of the tuft adjacent the fused end was embedded in the gel mass. These tufts were found to be firmly fixed into the gel mass and required at least 19N force to pull them out.

.....

○ Claims.


1. A toothbrush head, connected to or connectable to, a toothbrush handle to thereby define a head-handle longitudinal direction, having a tip end remote from the handle when connected and a base end adjacent to the handle when connected, 5 having bristles projecting therefrom in a bristle direction, each bristle having an end proximate to the head and an end distanced from the head, *characterised* by the head incorporating a mass of a gel material, and at least a part of a bristle adjacent its end proximate to the head being embedded in the mass of gel material, and the 10 toothbrush head comprising a frame of a hard plastics material by which the mass is supported.

2. A toothbrush head, connected to or connectable to, a toothbrush handle to thereby define a head-handle longitudinal direction, having a tip end remote from the handle when connected and a base end adjacent to the handle when connected, 15 having bristles projecting therefrom in a bristle direction, each bristle having an end proximate to the head and an end distanced from the head, *characterised* by the head incorporating a mass of a polyurethane material, and at least a part of a bristle adjacent its end proximate to the head being embedded in the mass of polyurethane 20 material, and the toothbrush head comprises a frame of a hard plastics material by which the mass is supported.

3. A toothbrush head according to claim 1 or 2 *characterised* in that the frame comprises one or more cavity each respectively supporting one or more mass of the 25 material or supporting a part of the mass.

4. A toothbrush head according to claim 1, 2 or 3 *characterised* in that the frame is provided with one or more aperture passing through the frame from one surface of the frame to another surface of the frame, through which the material of 30 the mass passes from the one surface to the other surface to form a mushroom head at the other surface to thereby engage with the frame.

.....



5. A toothbrush head according to any one of claims 1 to 4 *characterised* in that the mass is in the form of a pad having a bristle surface, and is supported by the frame at a support point adjacent to the tip end and at a support point adjacent to the base end, but unsupported longitudinally between these two longitudinally spaced support points.
6. A toothbrush head according to claim 5 characterised in that a part of the frame longitudinally between the support points arches away from the back surface of the pad in a direction opposite to the bristle direction, to leave a void between the back surface and the frame.
7. A toothbrush head according to claim 6 characterised in that the side surface longitudinally between the supported parts of the pad is unsupported.
8. A toothbrush head according to any one of claims 1 to 7 characterised in that as seen in plan looking down on the bristle face the frame is "Y" shaped with its stem aligned with the longitudinal direction and the two arms adjacent to the handle.
9. A toothbrush head according to claim 9 characterised in that the frame has cavities in which pad fits, one cavity being adjacent to the tip end of the head being adjacent to the stem of the "Y" shaped frame, and another cavity adjacent to the handle being between the arms of the "Y" shaped frame.
10. A toothbrush head according to claim 1 *characterised* in that the gel material is a polyurethane gel material.

30

.....

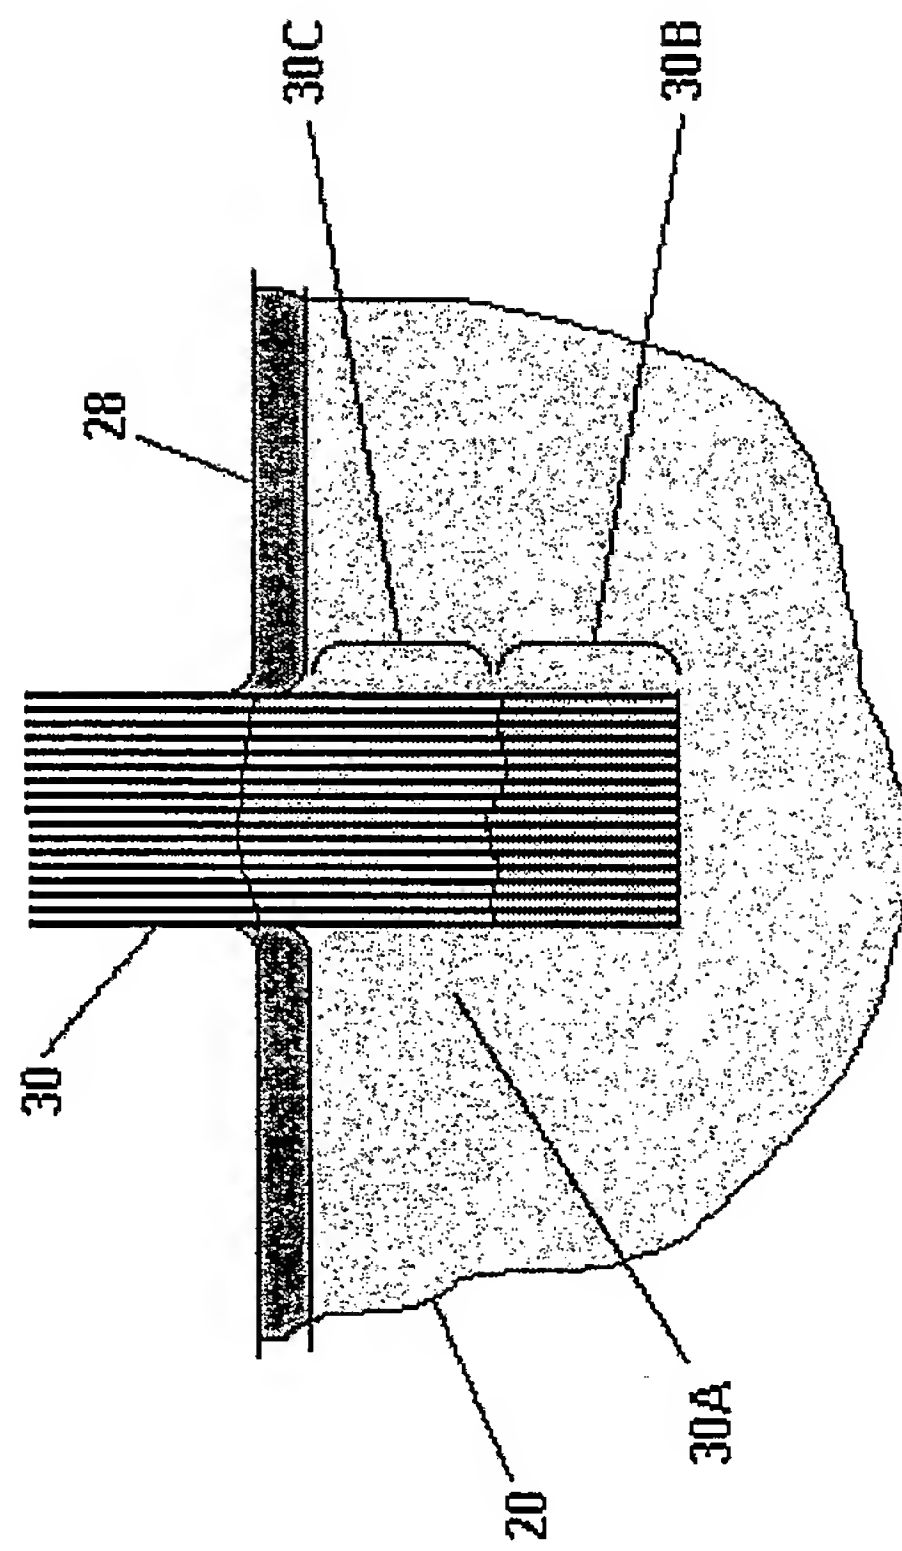
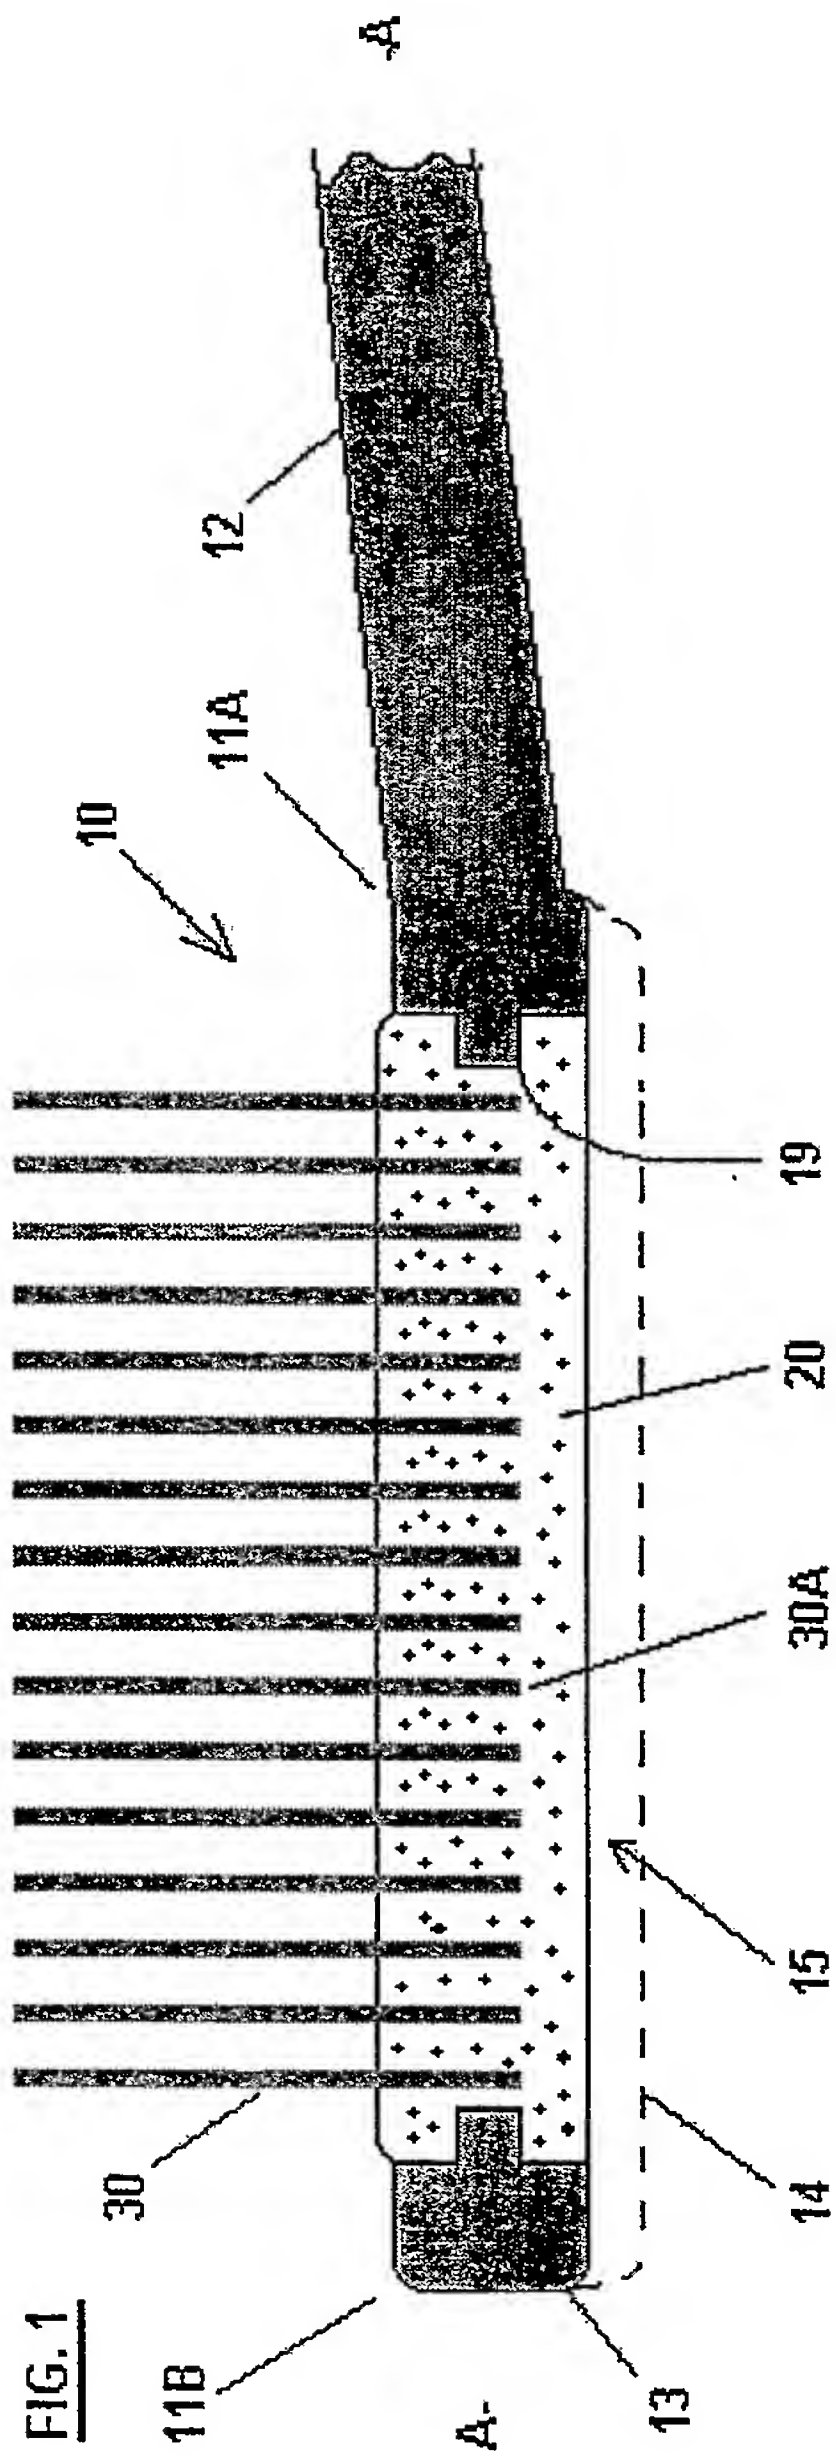




FIG. 2

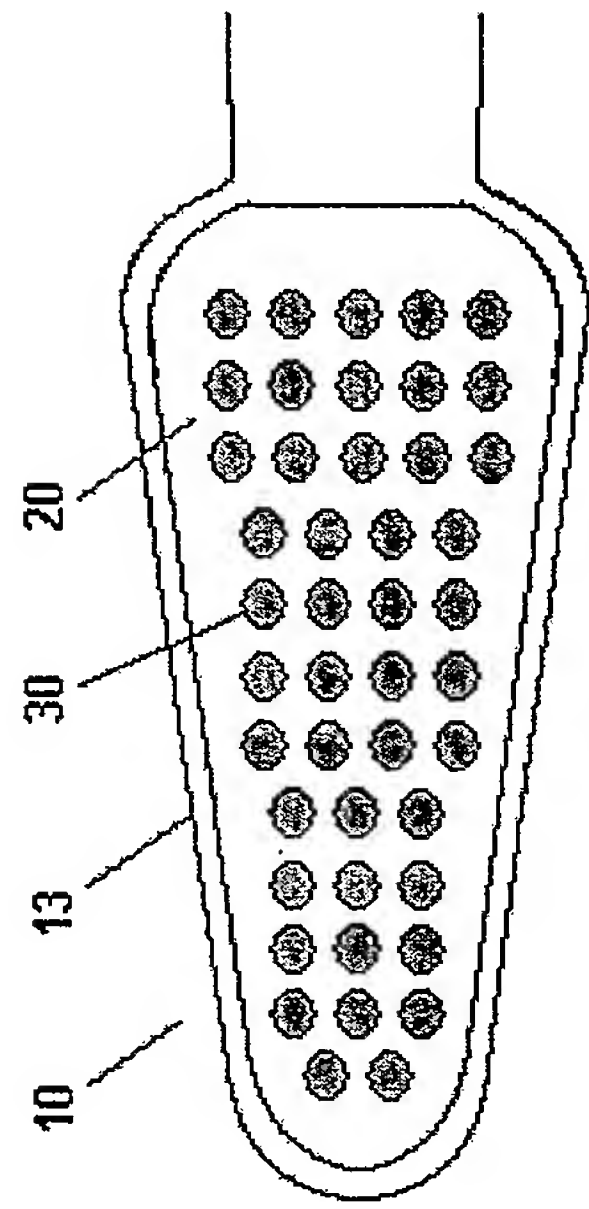


FIG. 2A

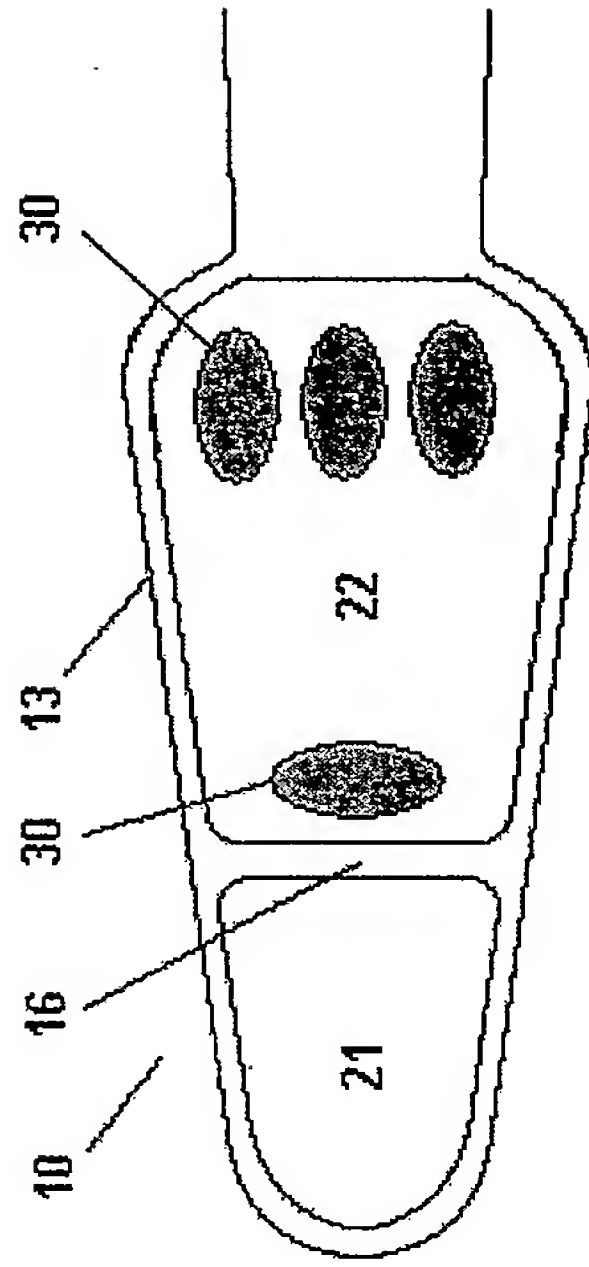


FIG. 2B

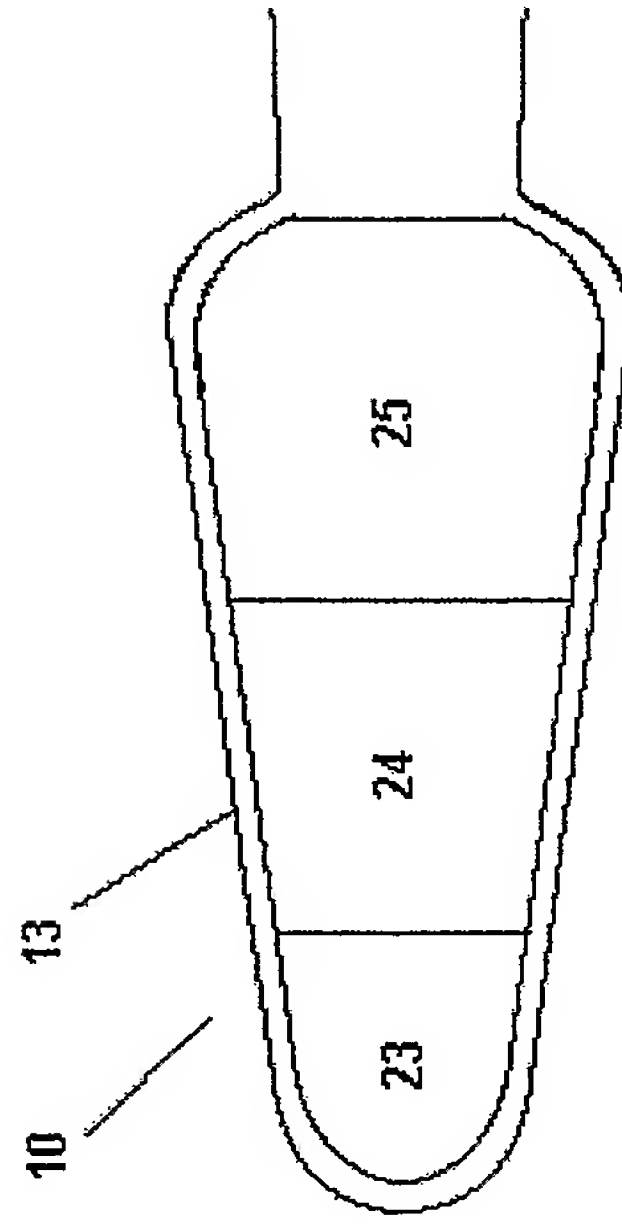


FIG. 2C

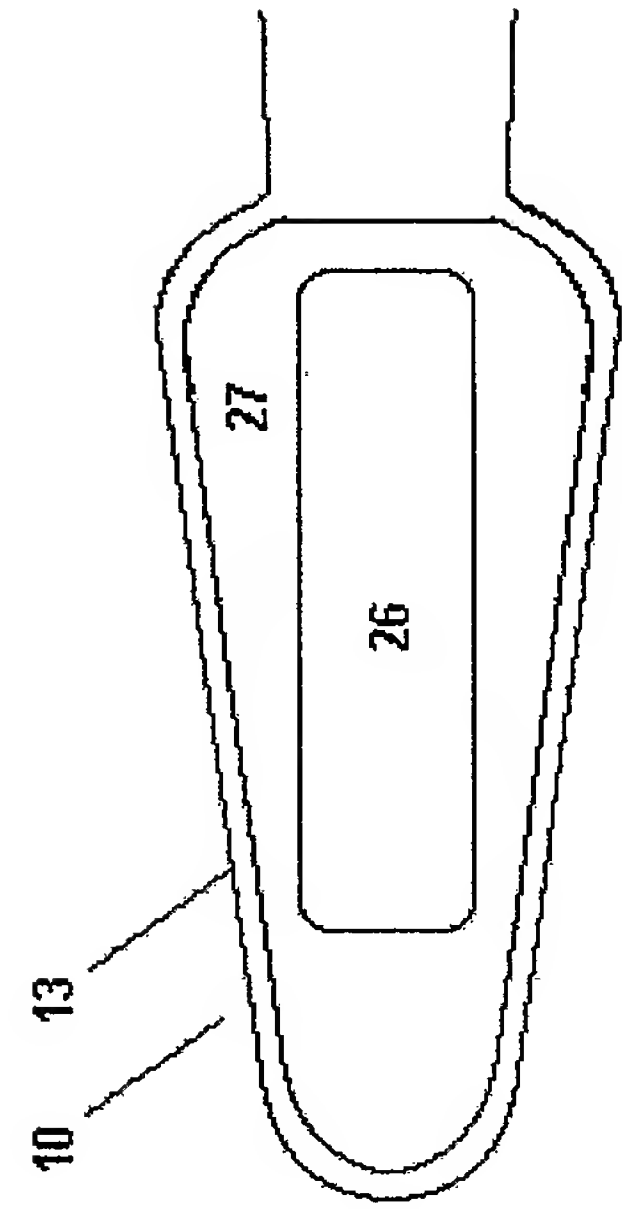


FIG. 2D



FIG. 4

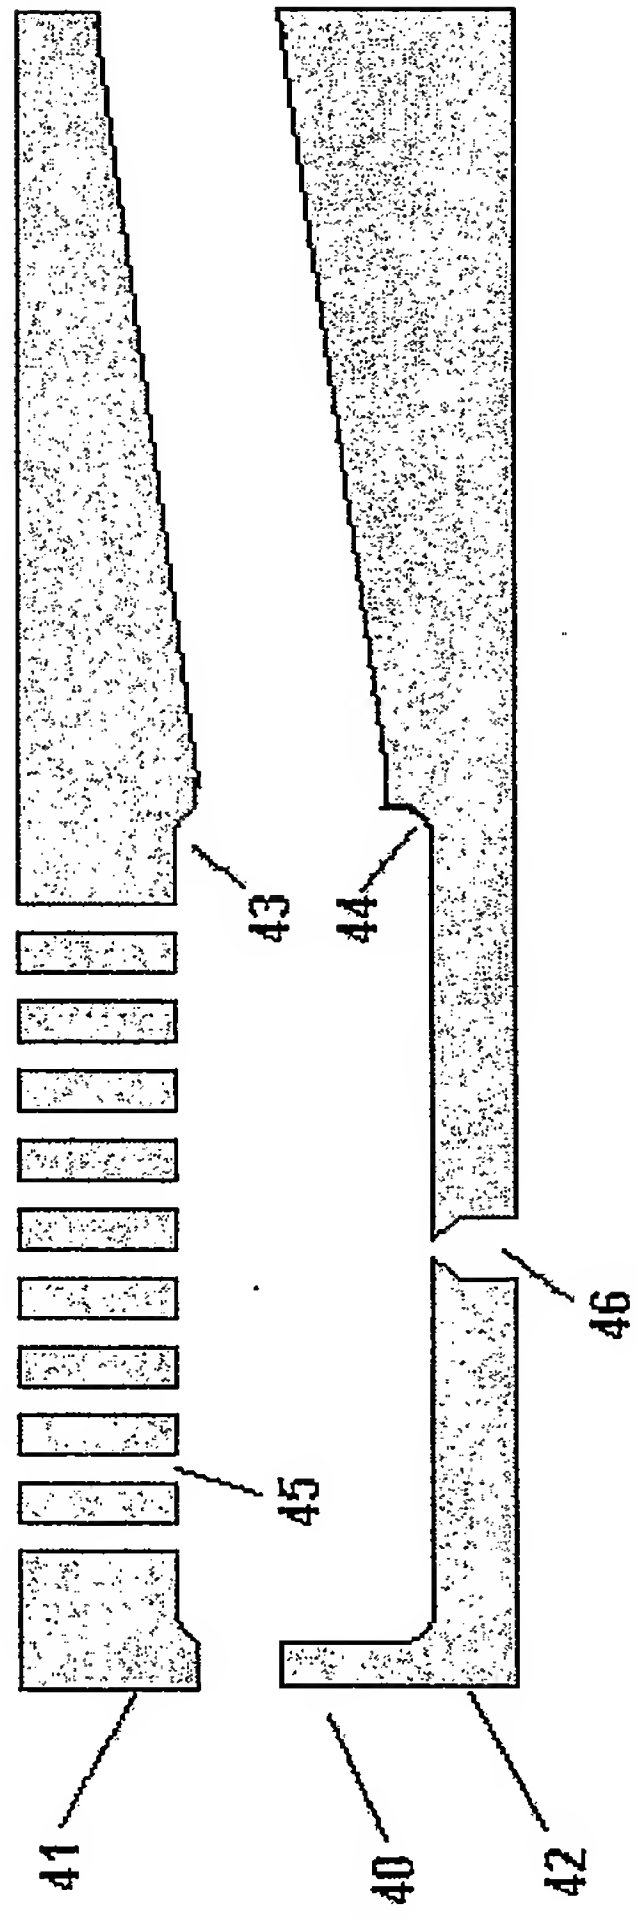


Fig. 4A

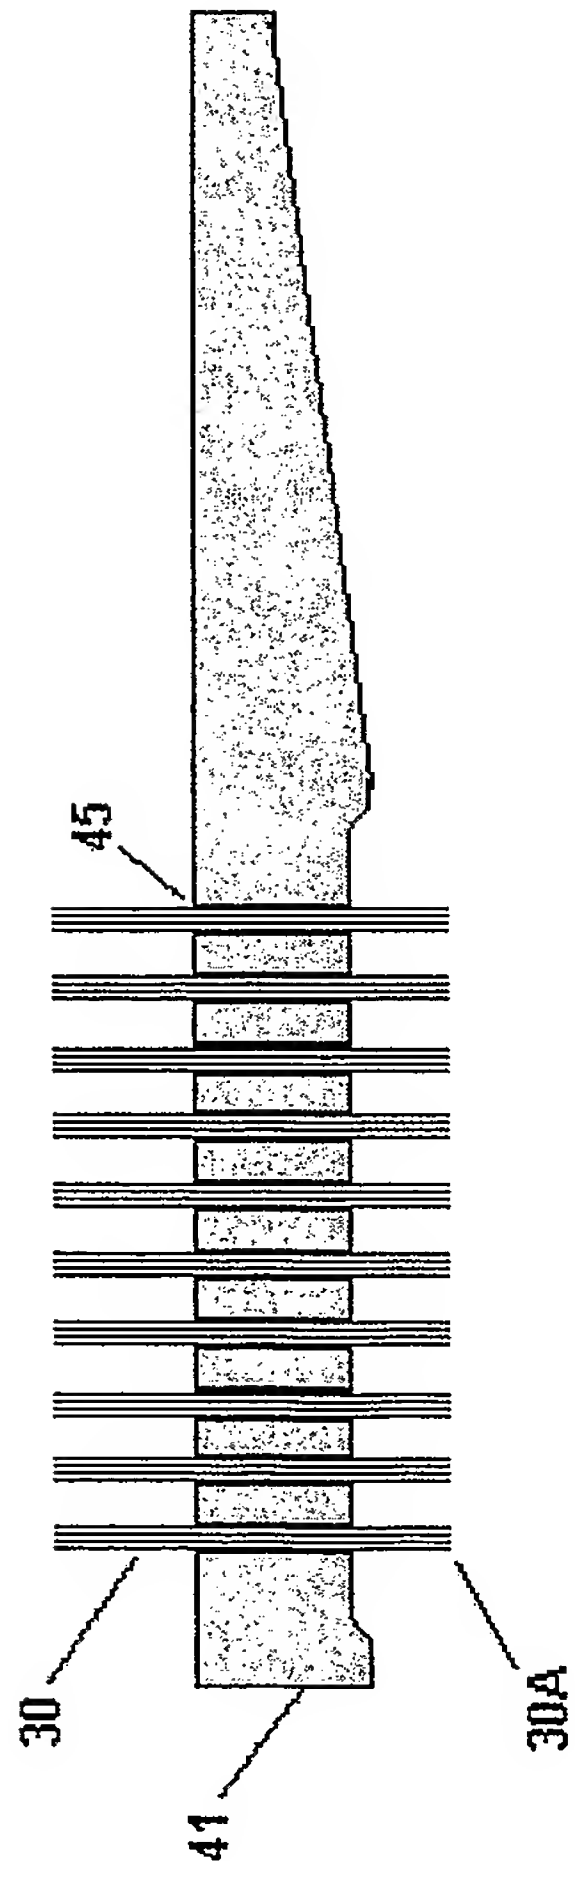


Fig. 4B

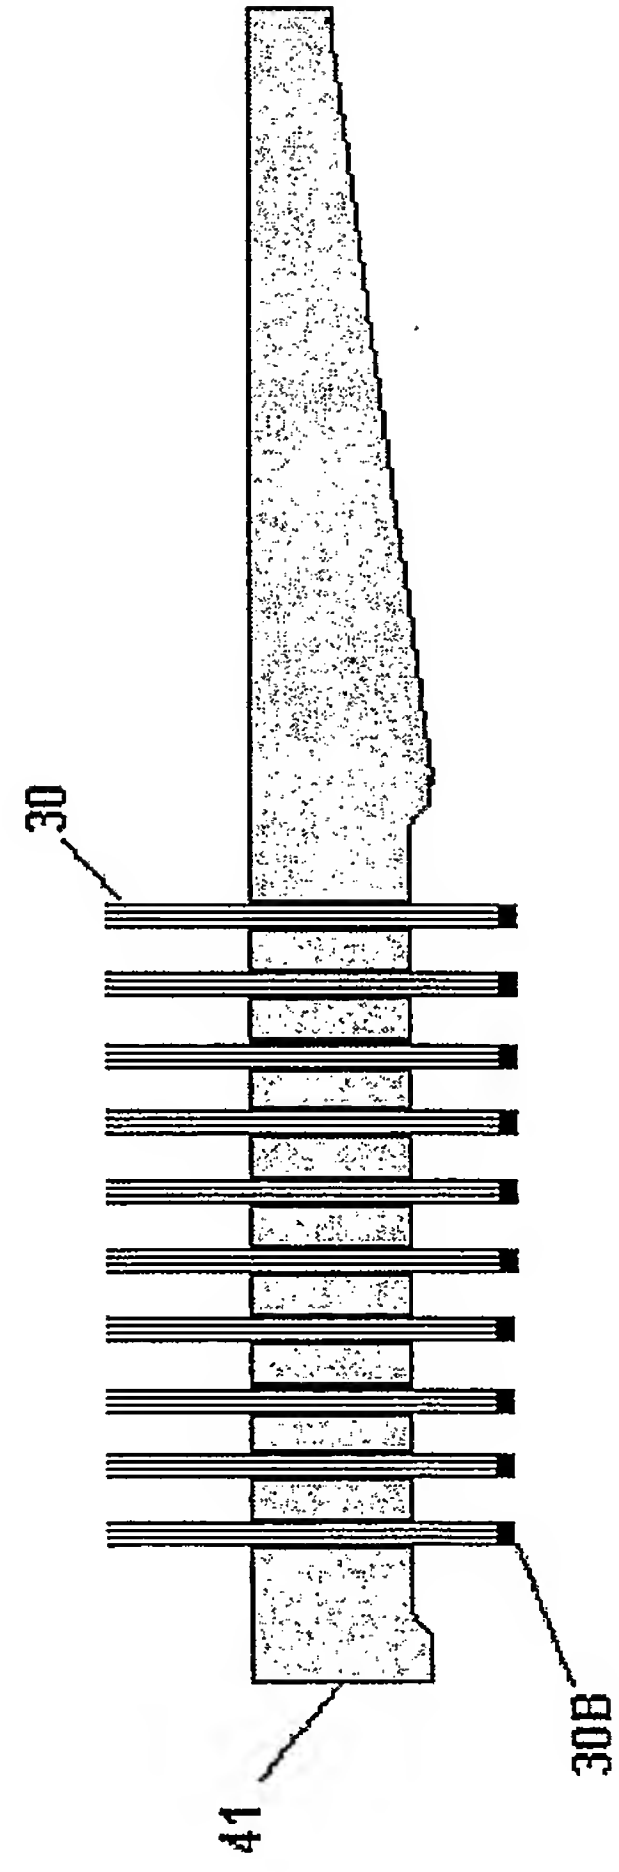


Fig. 4C

FIG. 4

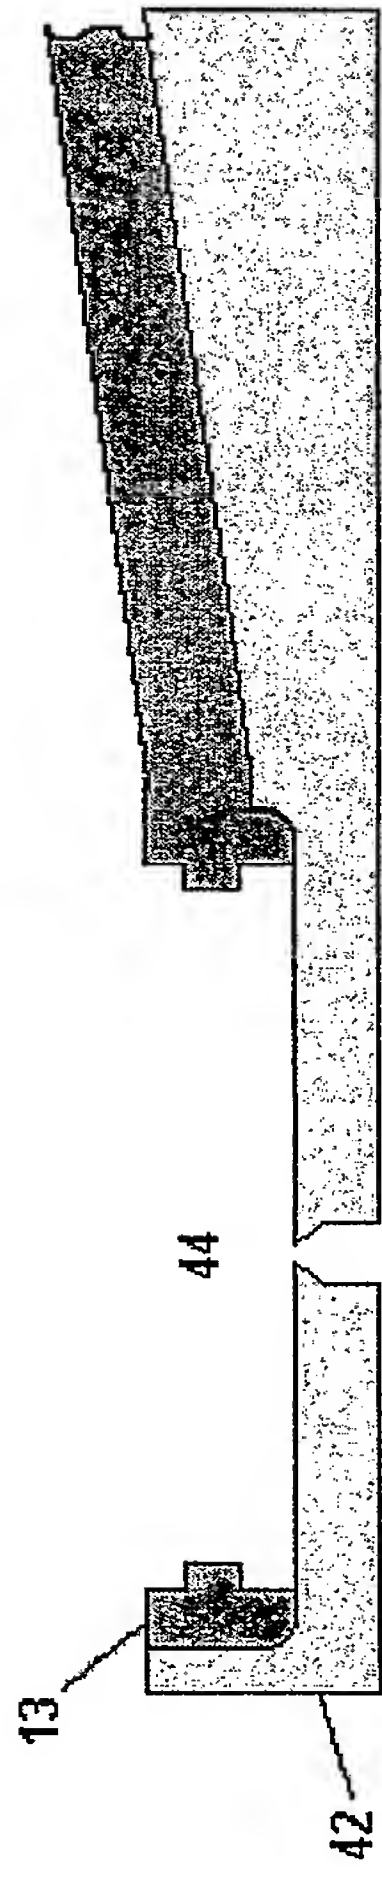


Fig. 4D

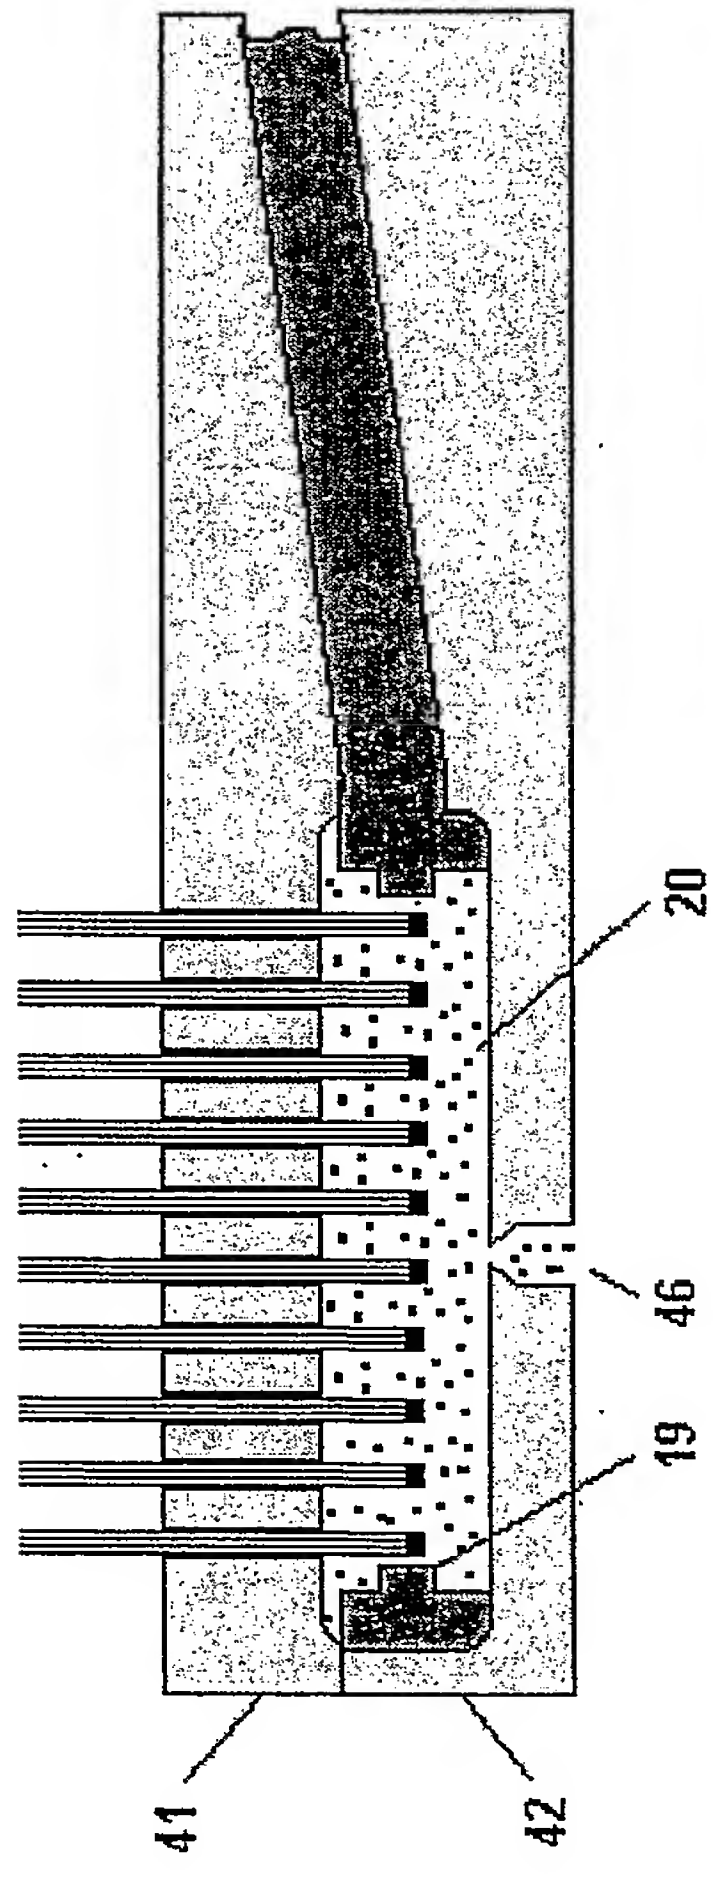


Fig. 4E

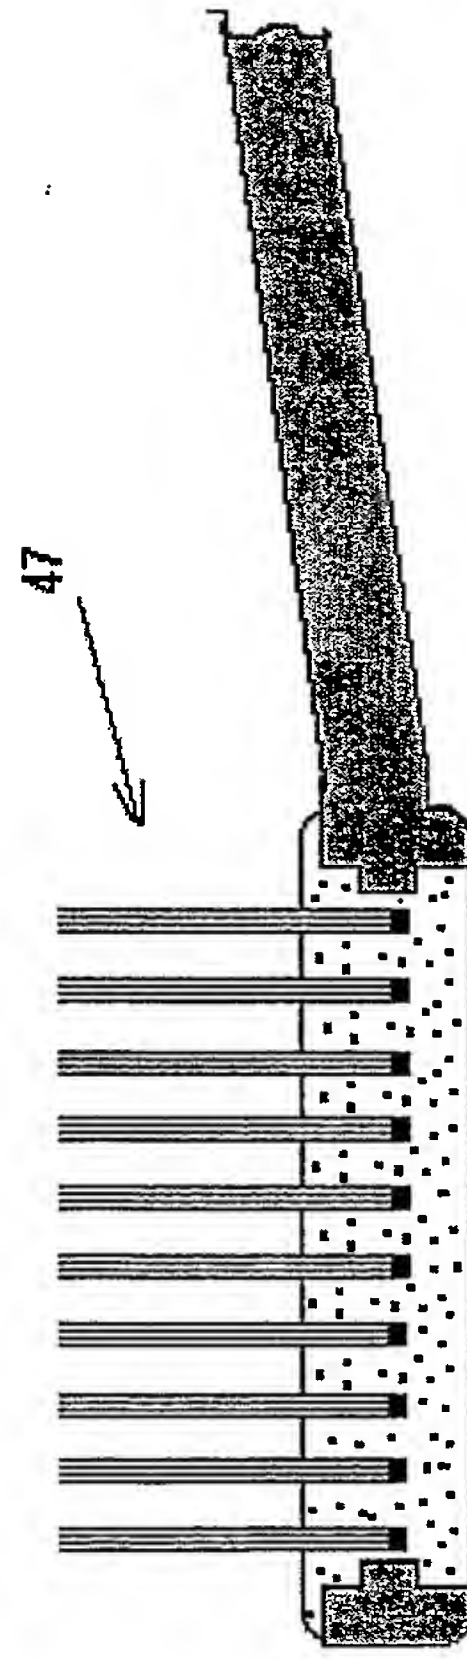

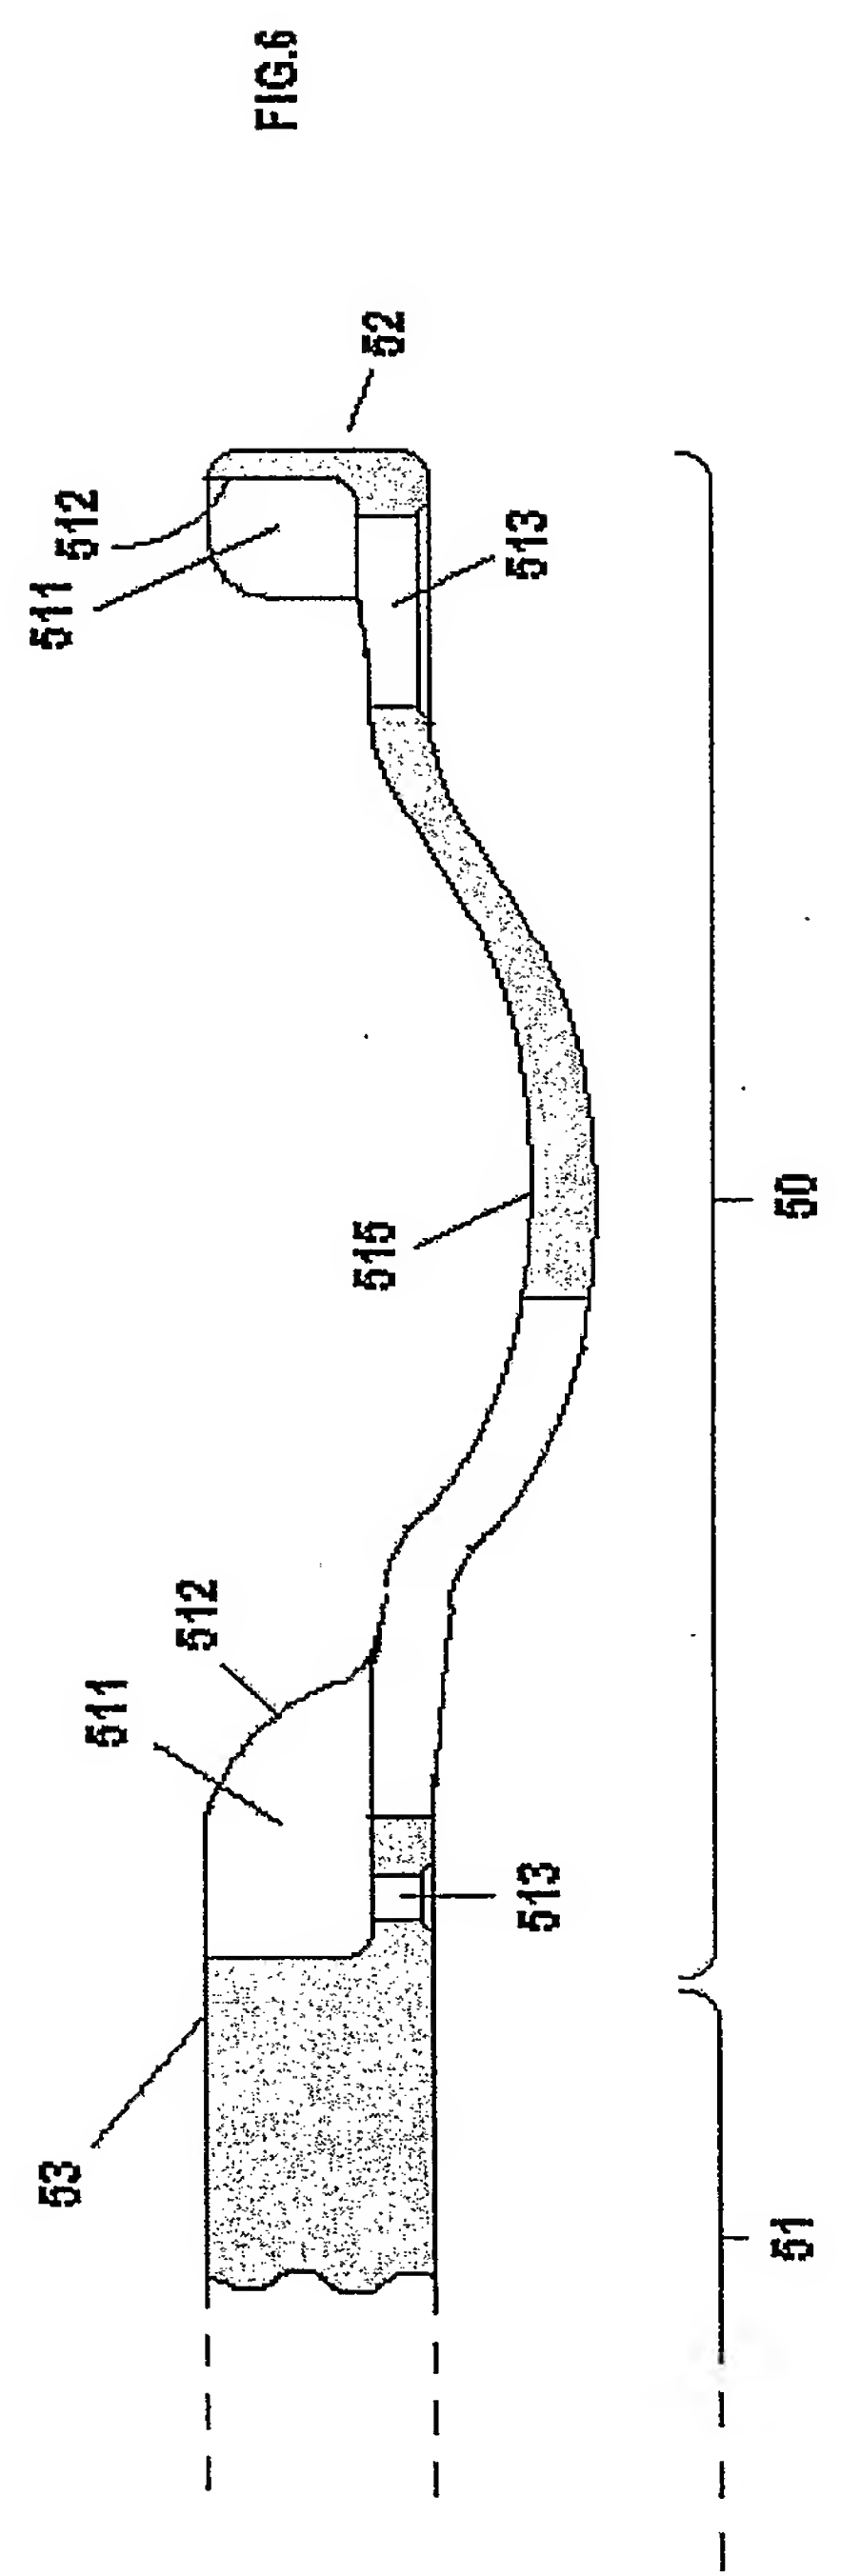
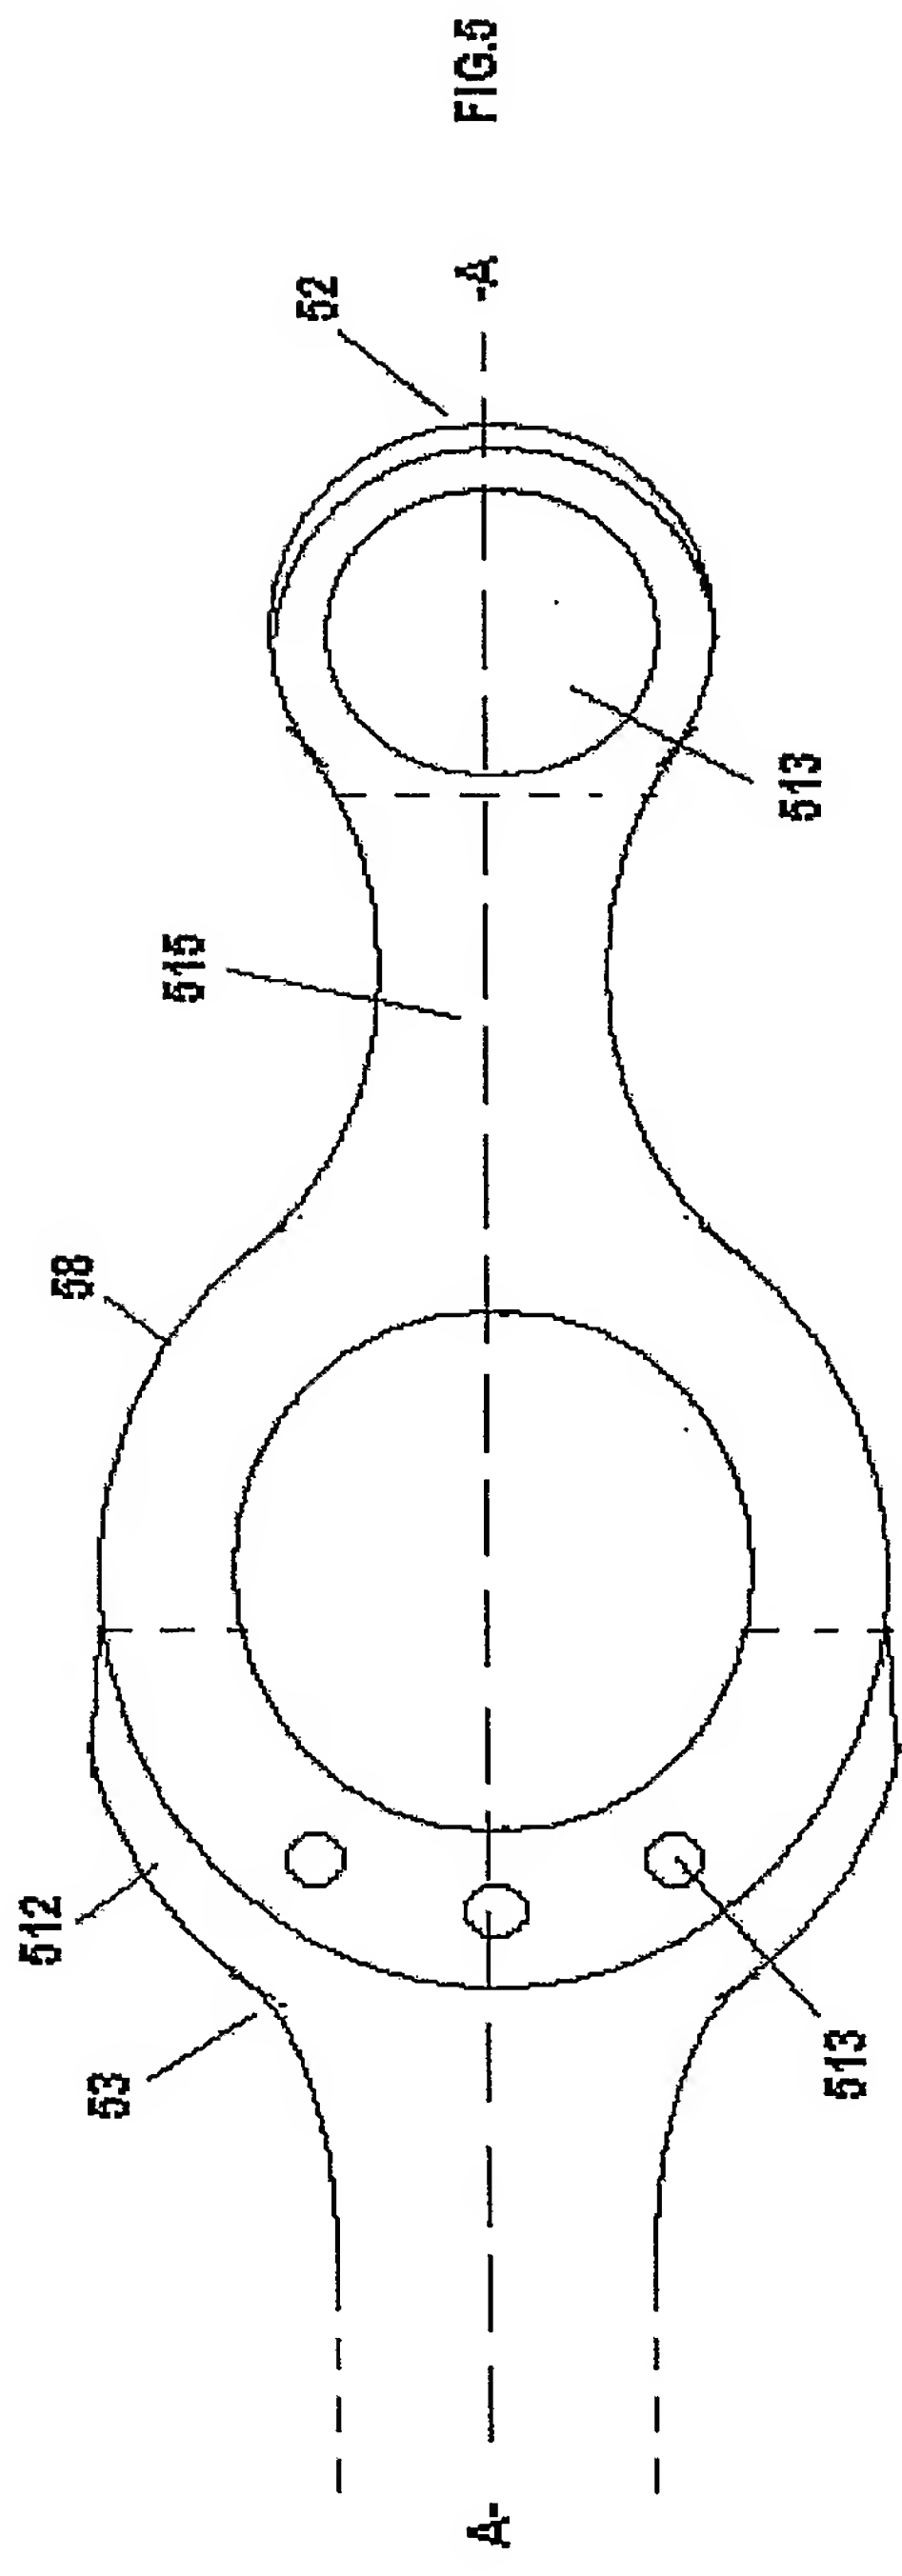


Fig 4F









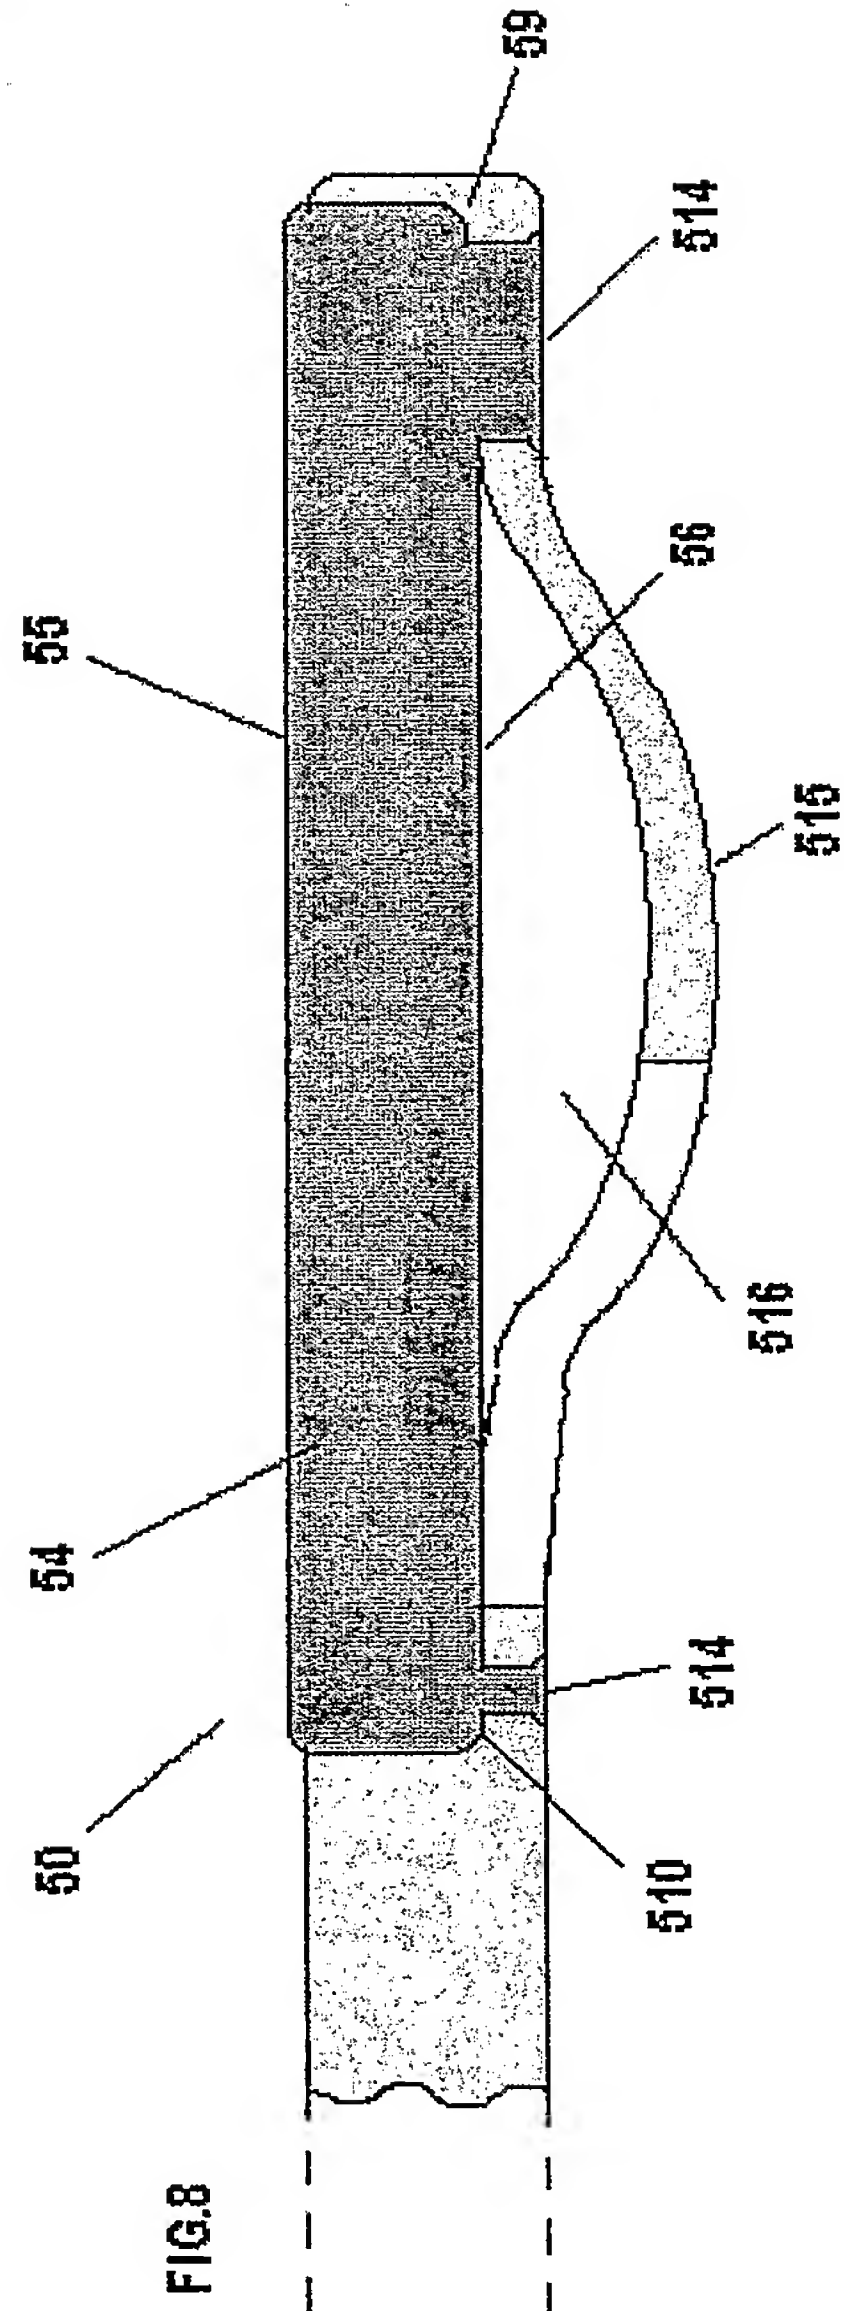


FIG. 9

FIG. 8

FIG. 7

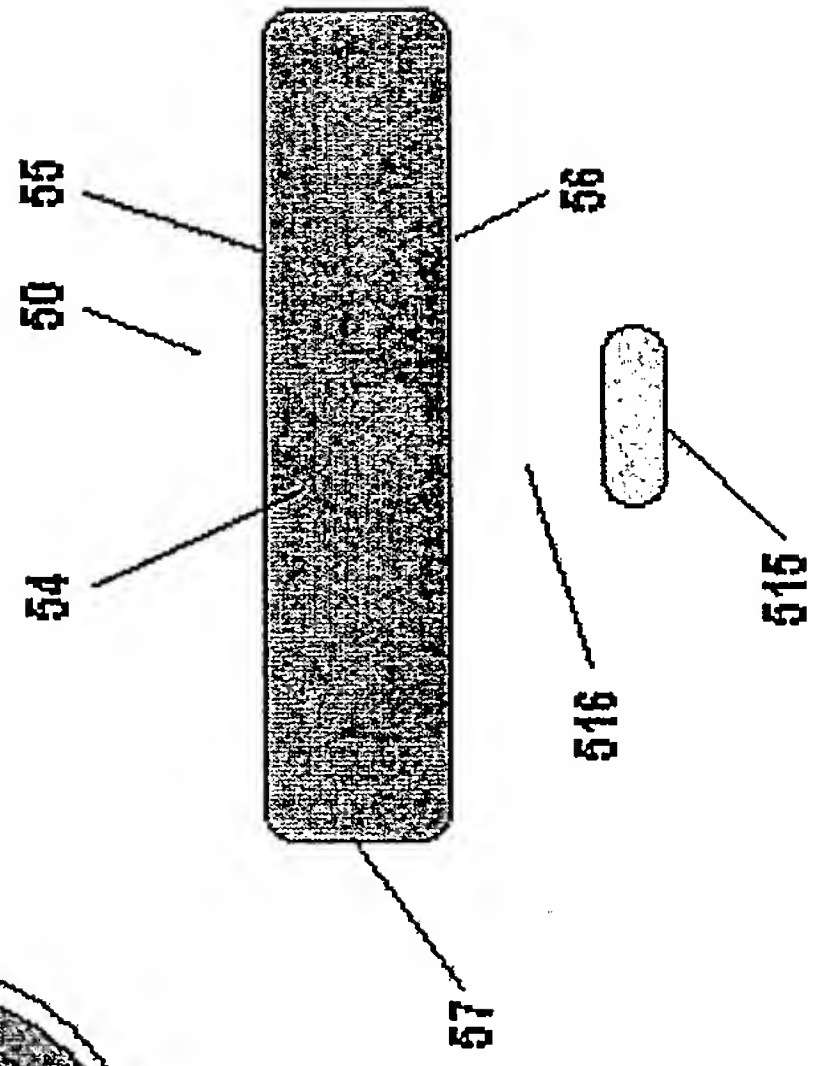

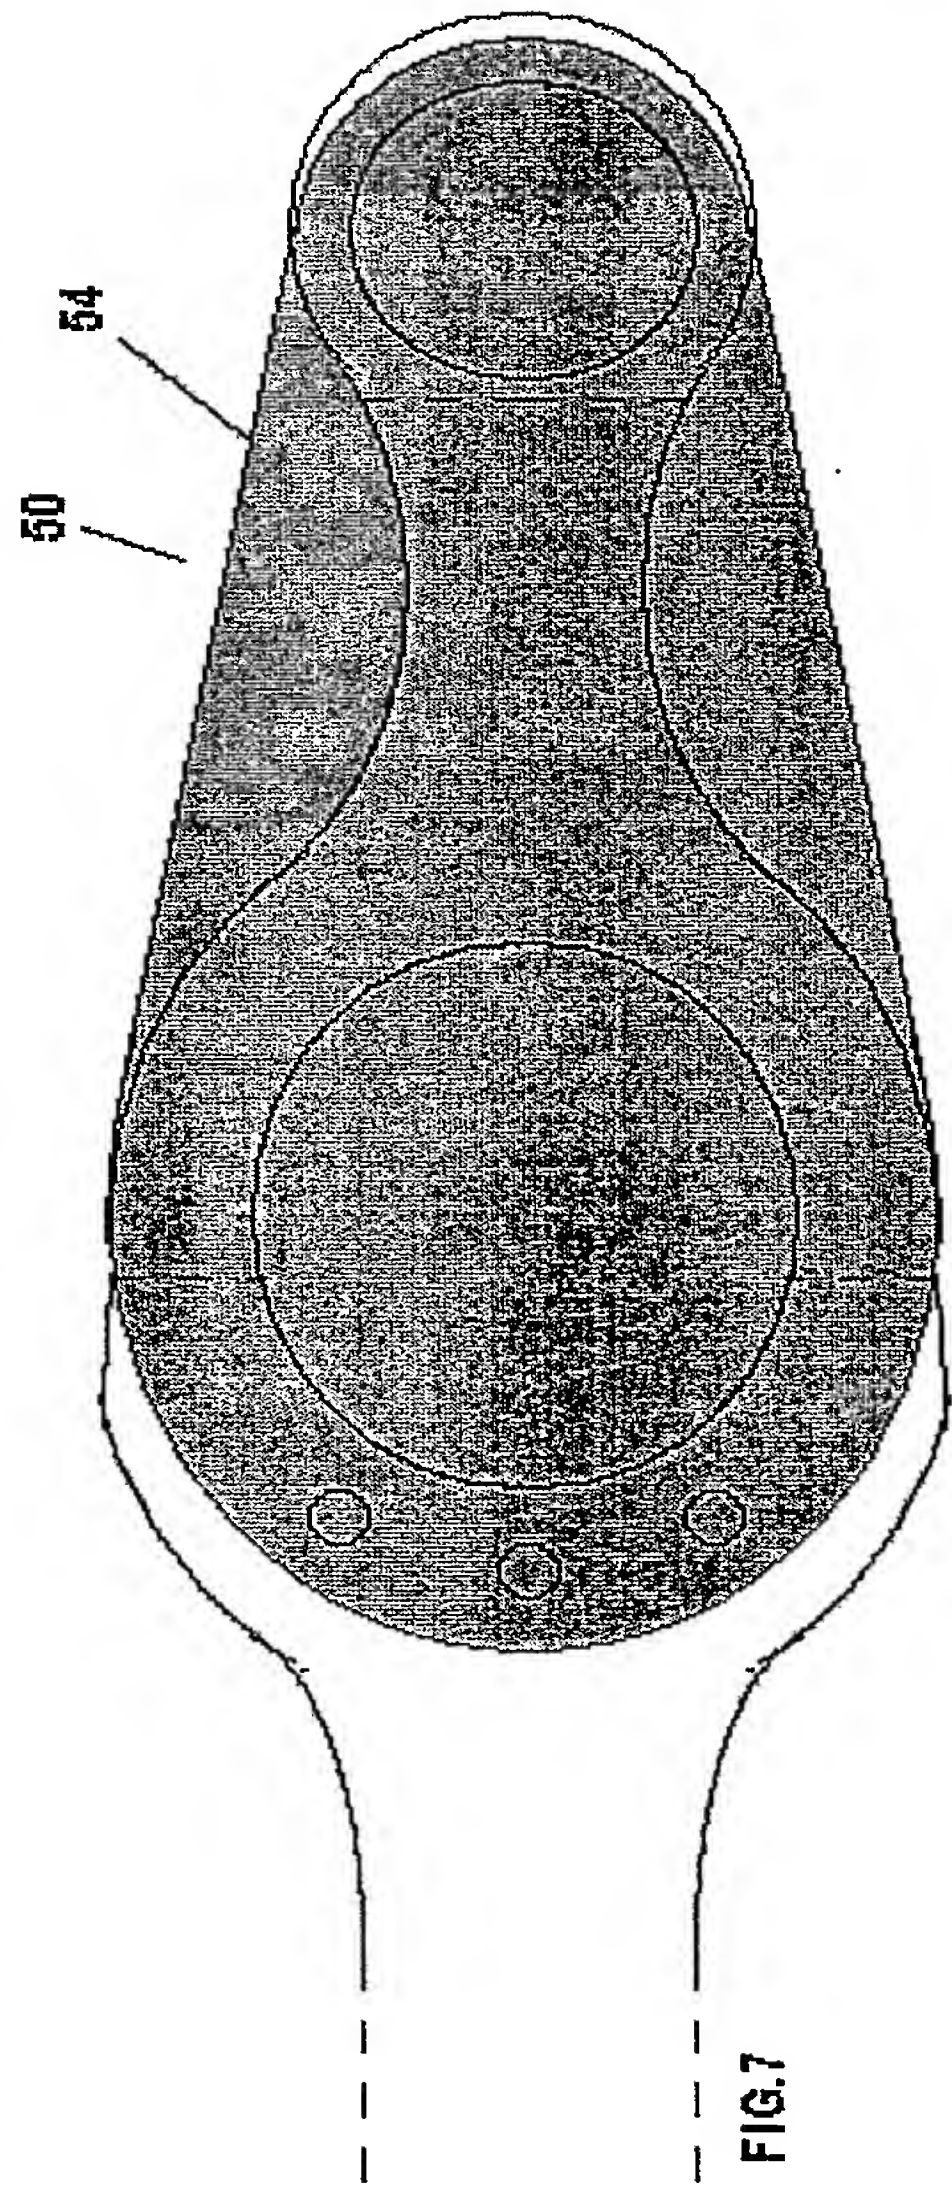